



US007449738B2

(12) **United States Patent**
Eom et al.

(10) **Patent No.:** **US 7,449,738 B2**
(45) **Date of Patent:** **Nov. 11, 2008**

(54) **STRAIN-ENGINEERED FERROELECTRIC THIN FILMS**

(75) Inventors: **Chang-Beom Eom**, Madison, WI (US);
Kyung-Jin Choi, Madison, WI (US);
Darrell G. Schlom, State College, PA (US);
Long-Qing Chen, College Park, PA (US)

(73) Assignee: **Wisconsin Alumni Research Foundation**, Madison, WI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 115 days.

(21) Appl. No.: **10/977,335**

(22) Filed: **Oct. 29, 2004**

(65) **Prior Publication Data**

US 2006/0091434 A1 May 4, 2006

(51) **Int. Cl.**
H01L 29/76 (2006.01)
H01L 29/94 (2006.01)

(52) **U.S. Cl.** **257/295**

(58) **Field of Classification Search** **257/295,**
257/E21.664; 438/3

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,374,578 A * 12/1994 Patel et al. 438/3
5,760,432 A 6/1998 Abe et al.
5,889,299 A 3/1999 Abe et al.
6,533,906 B2 3/2003 Kawakubo et al.
6,747,529 B2 6/2004 Abe et al.

OTHER PUBLICATIONS

C.B. Eom, et al., "Fabrication and Properties of Epitaxial Ferroelectric Heterostructures with (SrRu₃) Isotropic Metallic Oxide Electrodes," Appl. Phys. Lett, vol. 63, No. 18, Nov. 1, 1993, pp. 2570-2572.

N.A. Pertsev, et al., "Effect of Mechanical Boundary Conditions on Phase Diagrams of Epitaxial Ferroelectric Thin Films," Phys. Rev. Lett., vol. 80, No. 9, Mar. 2, 1998, pp. 1988-1991.

E.D. Specht, et al., "X-Ray Diffraction Measurement of the Effect of Layer Thickness on the Ferroelectric Transition in Epitaxial KTaO₃/KNbO₃ Multilayers," Phys. Rev. Lett., vol. 80, No. 10, May 11, 1998, pp. 4317-4320.

M. Sepliarsky, et al., "Ferroelectric Phase Transitions and Dynamical Behavior in KnbO₃/KTaO₃ Superlattices by Molecular-Dynamics Simulation," J. Appl. Phys., vol. 91, No. 5, Mar. 1, 2002, pp. 3165-3171.

S.K. Streiffer, et al., "Observation of Nanoscale 180° Stripe Domains in Ferroelectric PbTiO₃ Thin Films," Phys. Rev. Lett., vol. 89, No. 6, Aug. 5, 2002, pp. 067601-1-067601-4.

J. Schubert, et al., "Structural and Optical Properties of Epitaxial BaTiO₃ Thin Films Grown on GdScO₃(110)," Appl. Phys. Lett., vol. 82, No. 20, May 19, 2003, pp. 3460-3462.

K.J. Choi and C.B. Eom, "Strain-Induced Enhancement of Phase Transition Temperature in Epitaxial BaTiO₃ Thin Films on (110) GdScO₃ Substrates," Materials Research Society Symposium C: Ferroelectric Thin Films XII, Dec. 2003 (Abstract), 1 page.

* cited by examiner

Primary Examiner—Hung Vu

(74) Attorney, Agent, or Firm—Foley & Lardner LLP

(57) **ABSTRACT**

A strained thin film structure includes a substrate layer formed of a crystalline scandate material having a top surface, and a strained layer of crystalline ferroelectric epitaxially grown with respect to the crystalline substrate layer so as to be in a strained state and at a thickness below which dislocations begin to occur in the crystalline ferroelectric layer. An intermediate layer may be grown between the top surface of the substrate layer and the ferroelectric layer wherein the intermediate layer carries the lattice structure of the underlying substrate layer. The properties of the ferroelectric film are greatly enhanced as compared to the bulk ferroelectric material, and such films are suitable for use in applications including ferroelectric memories.

32 Claims, 8 Drawing Sheets

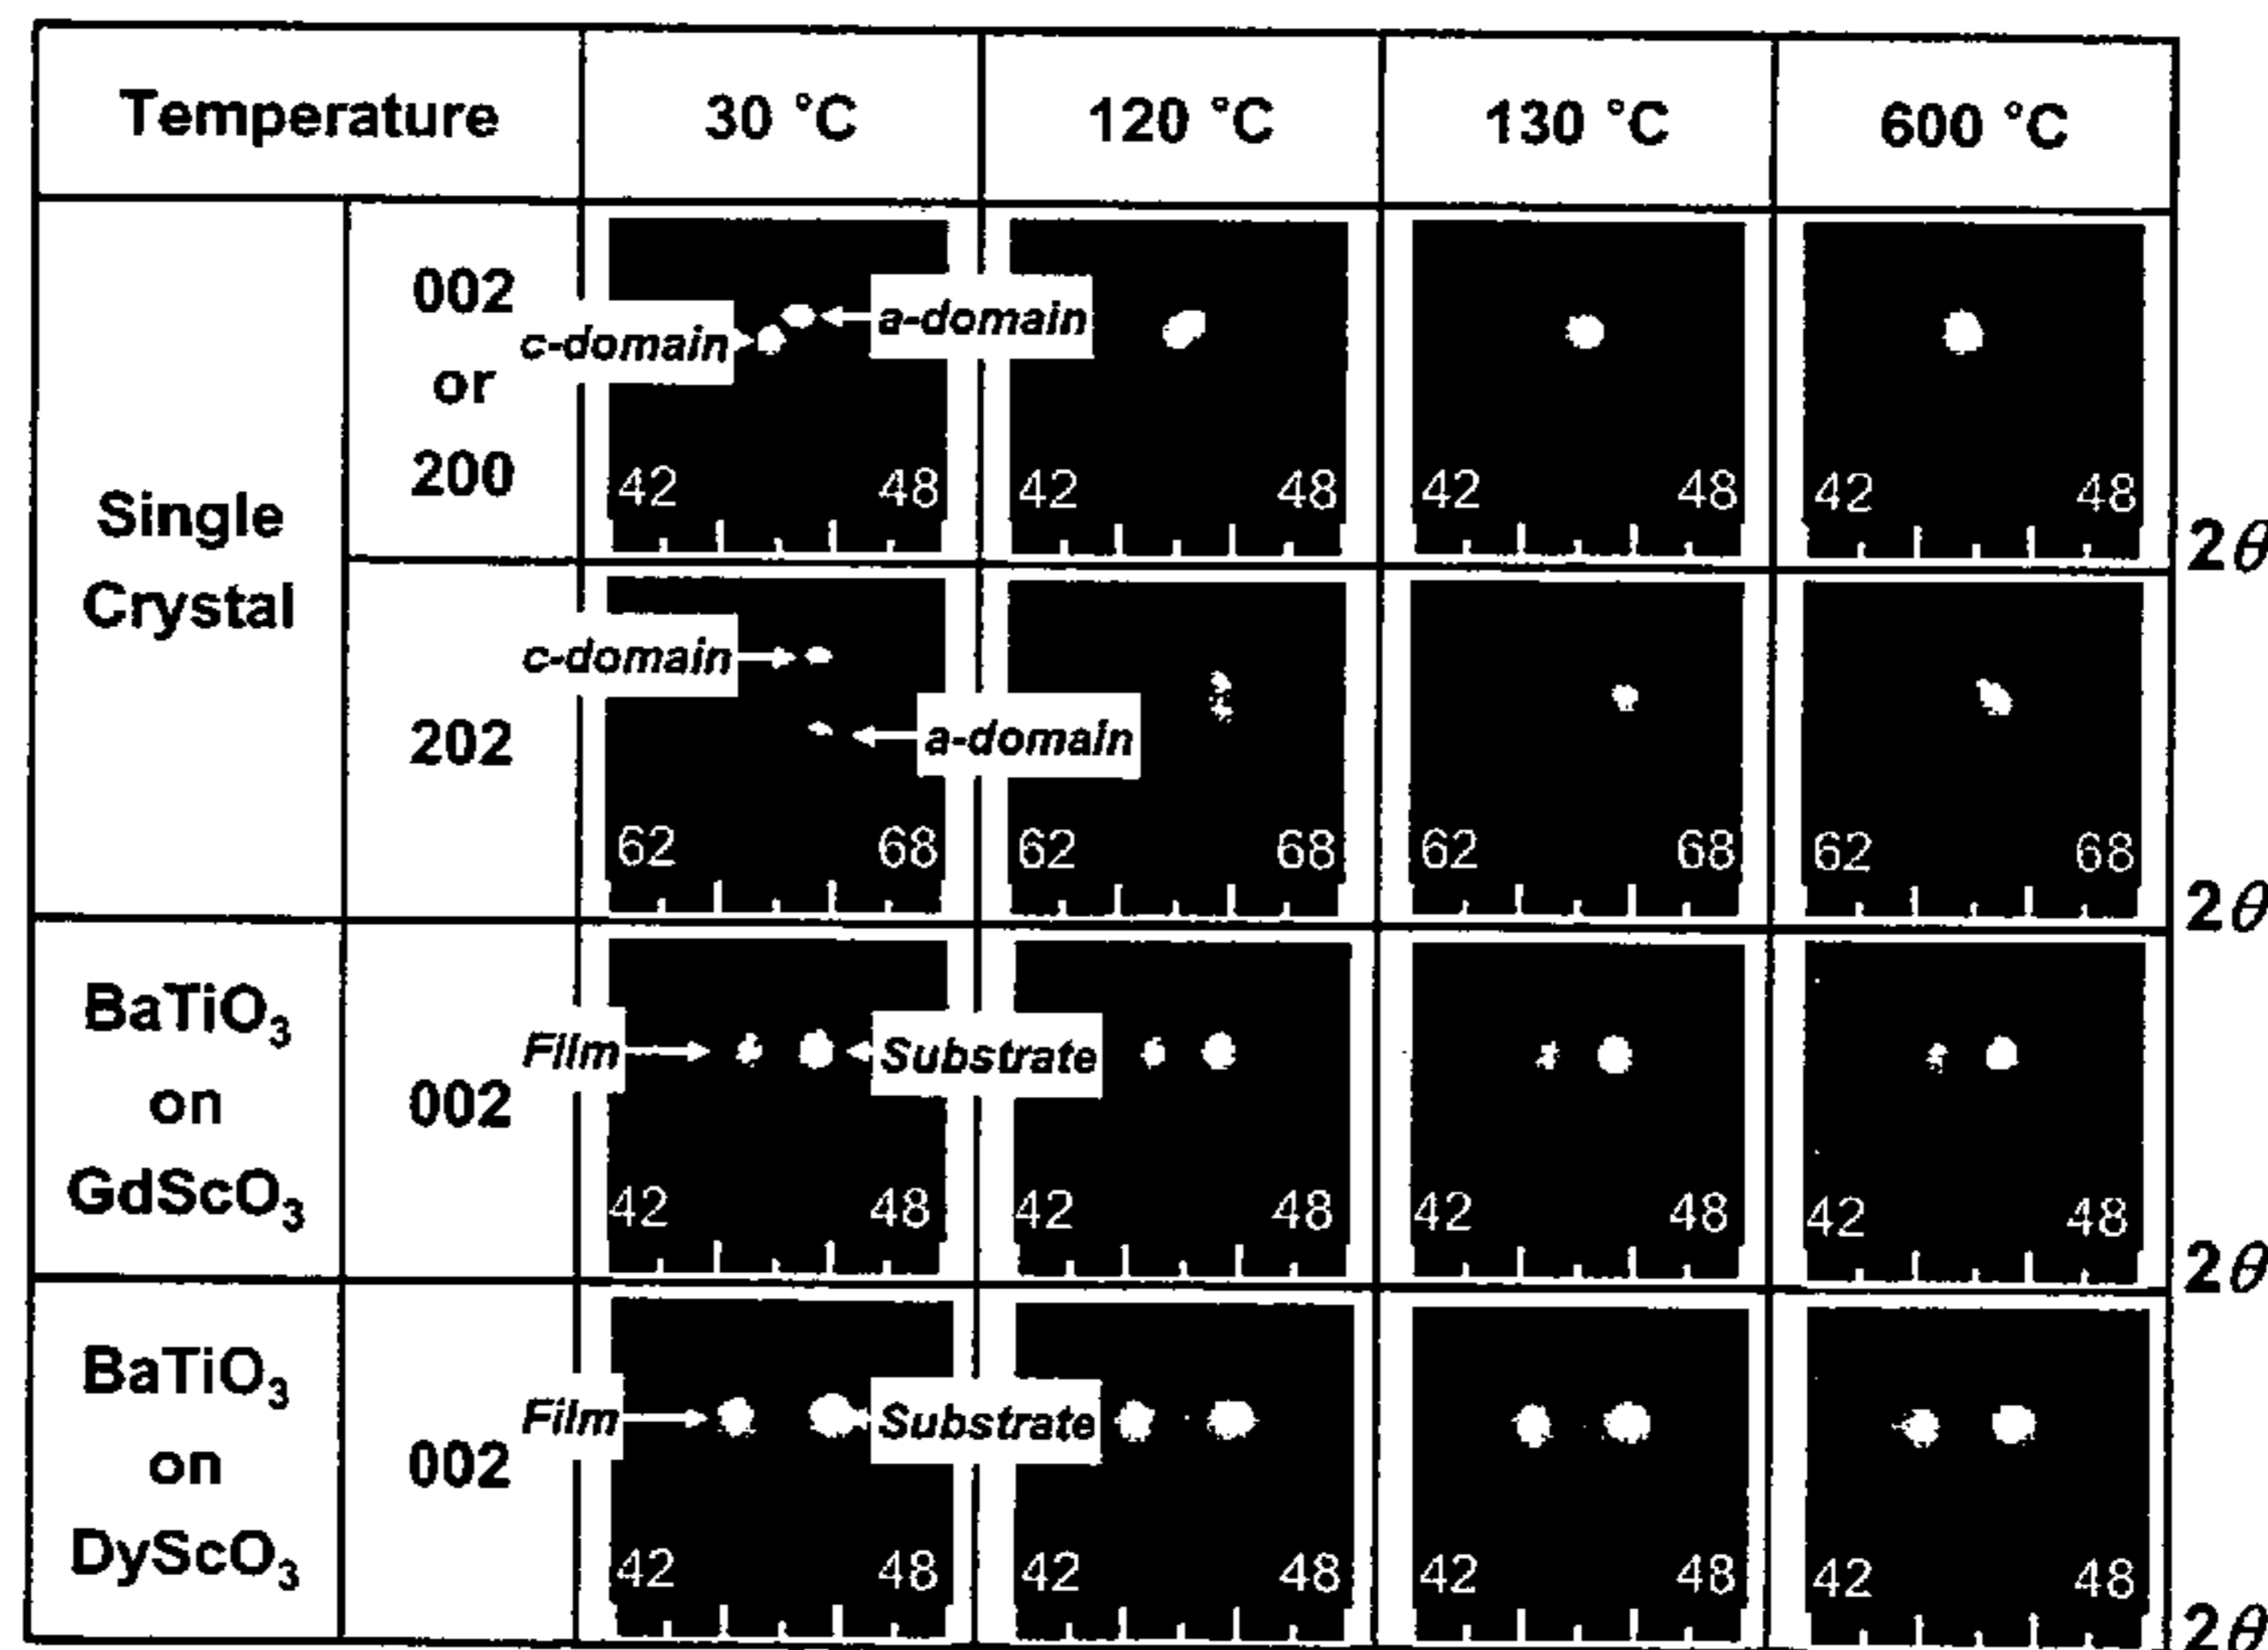
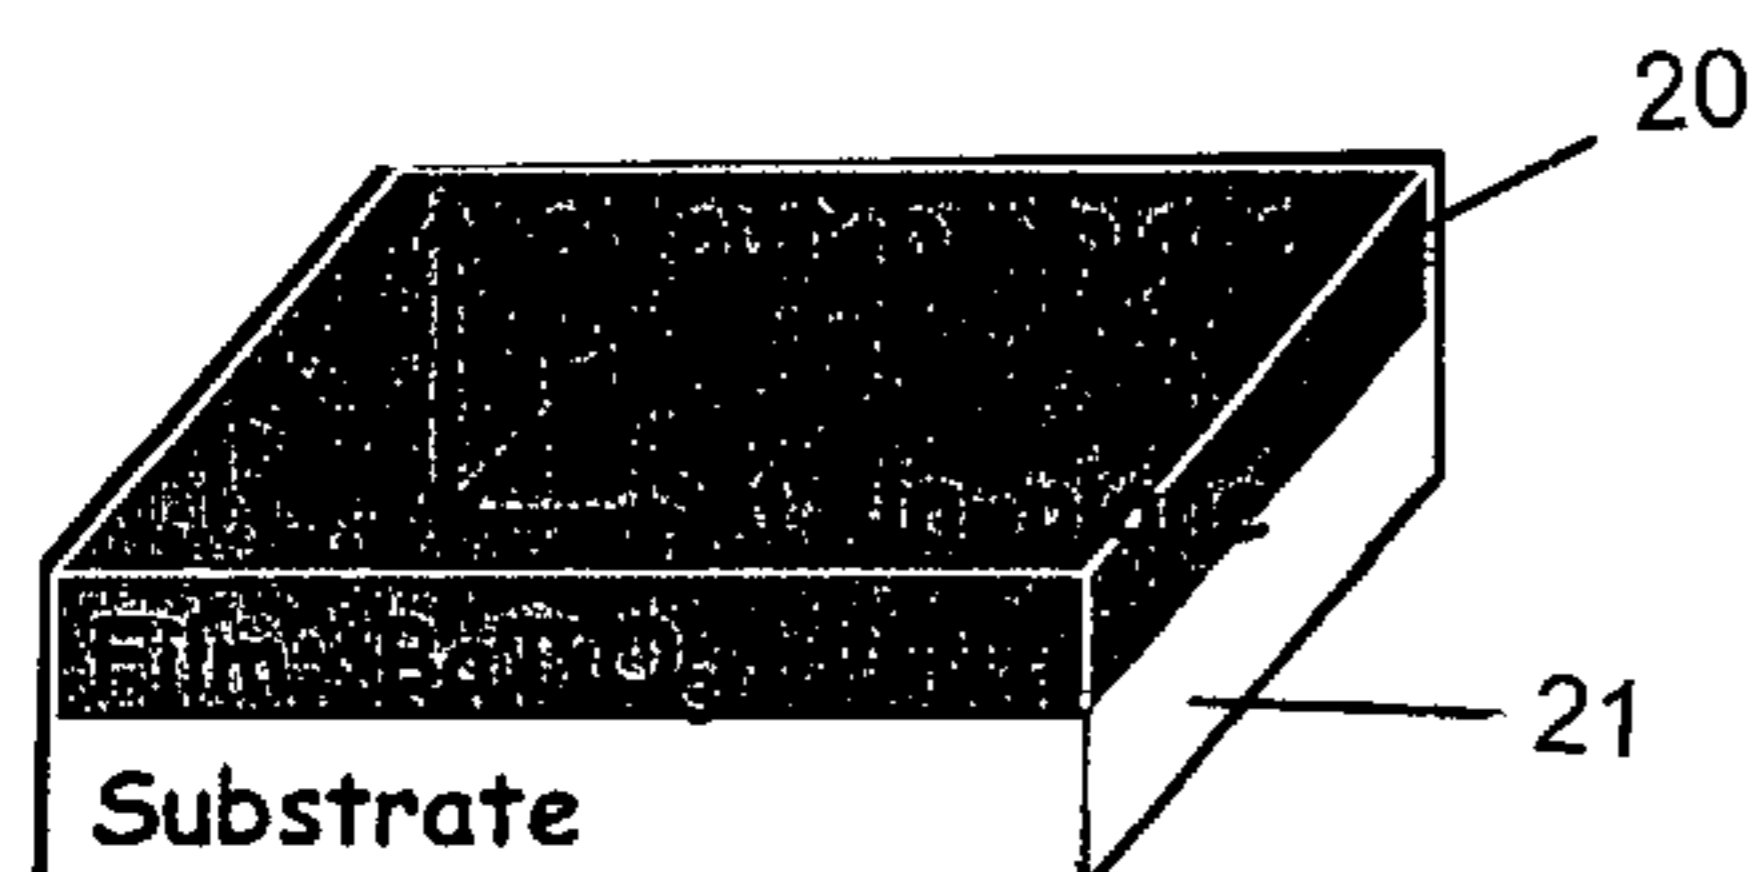
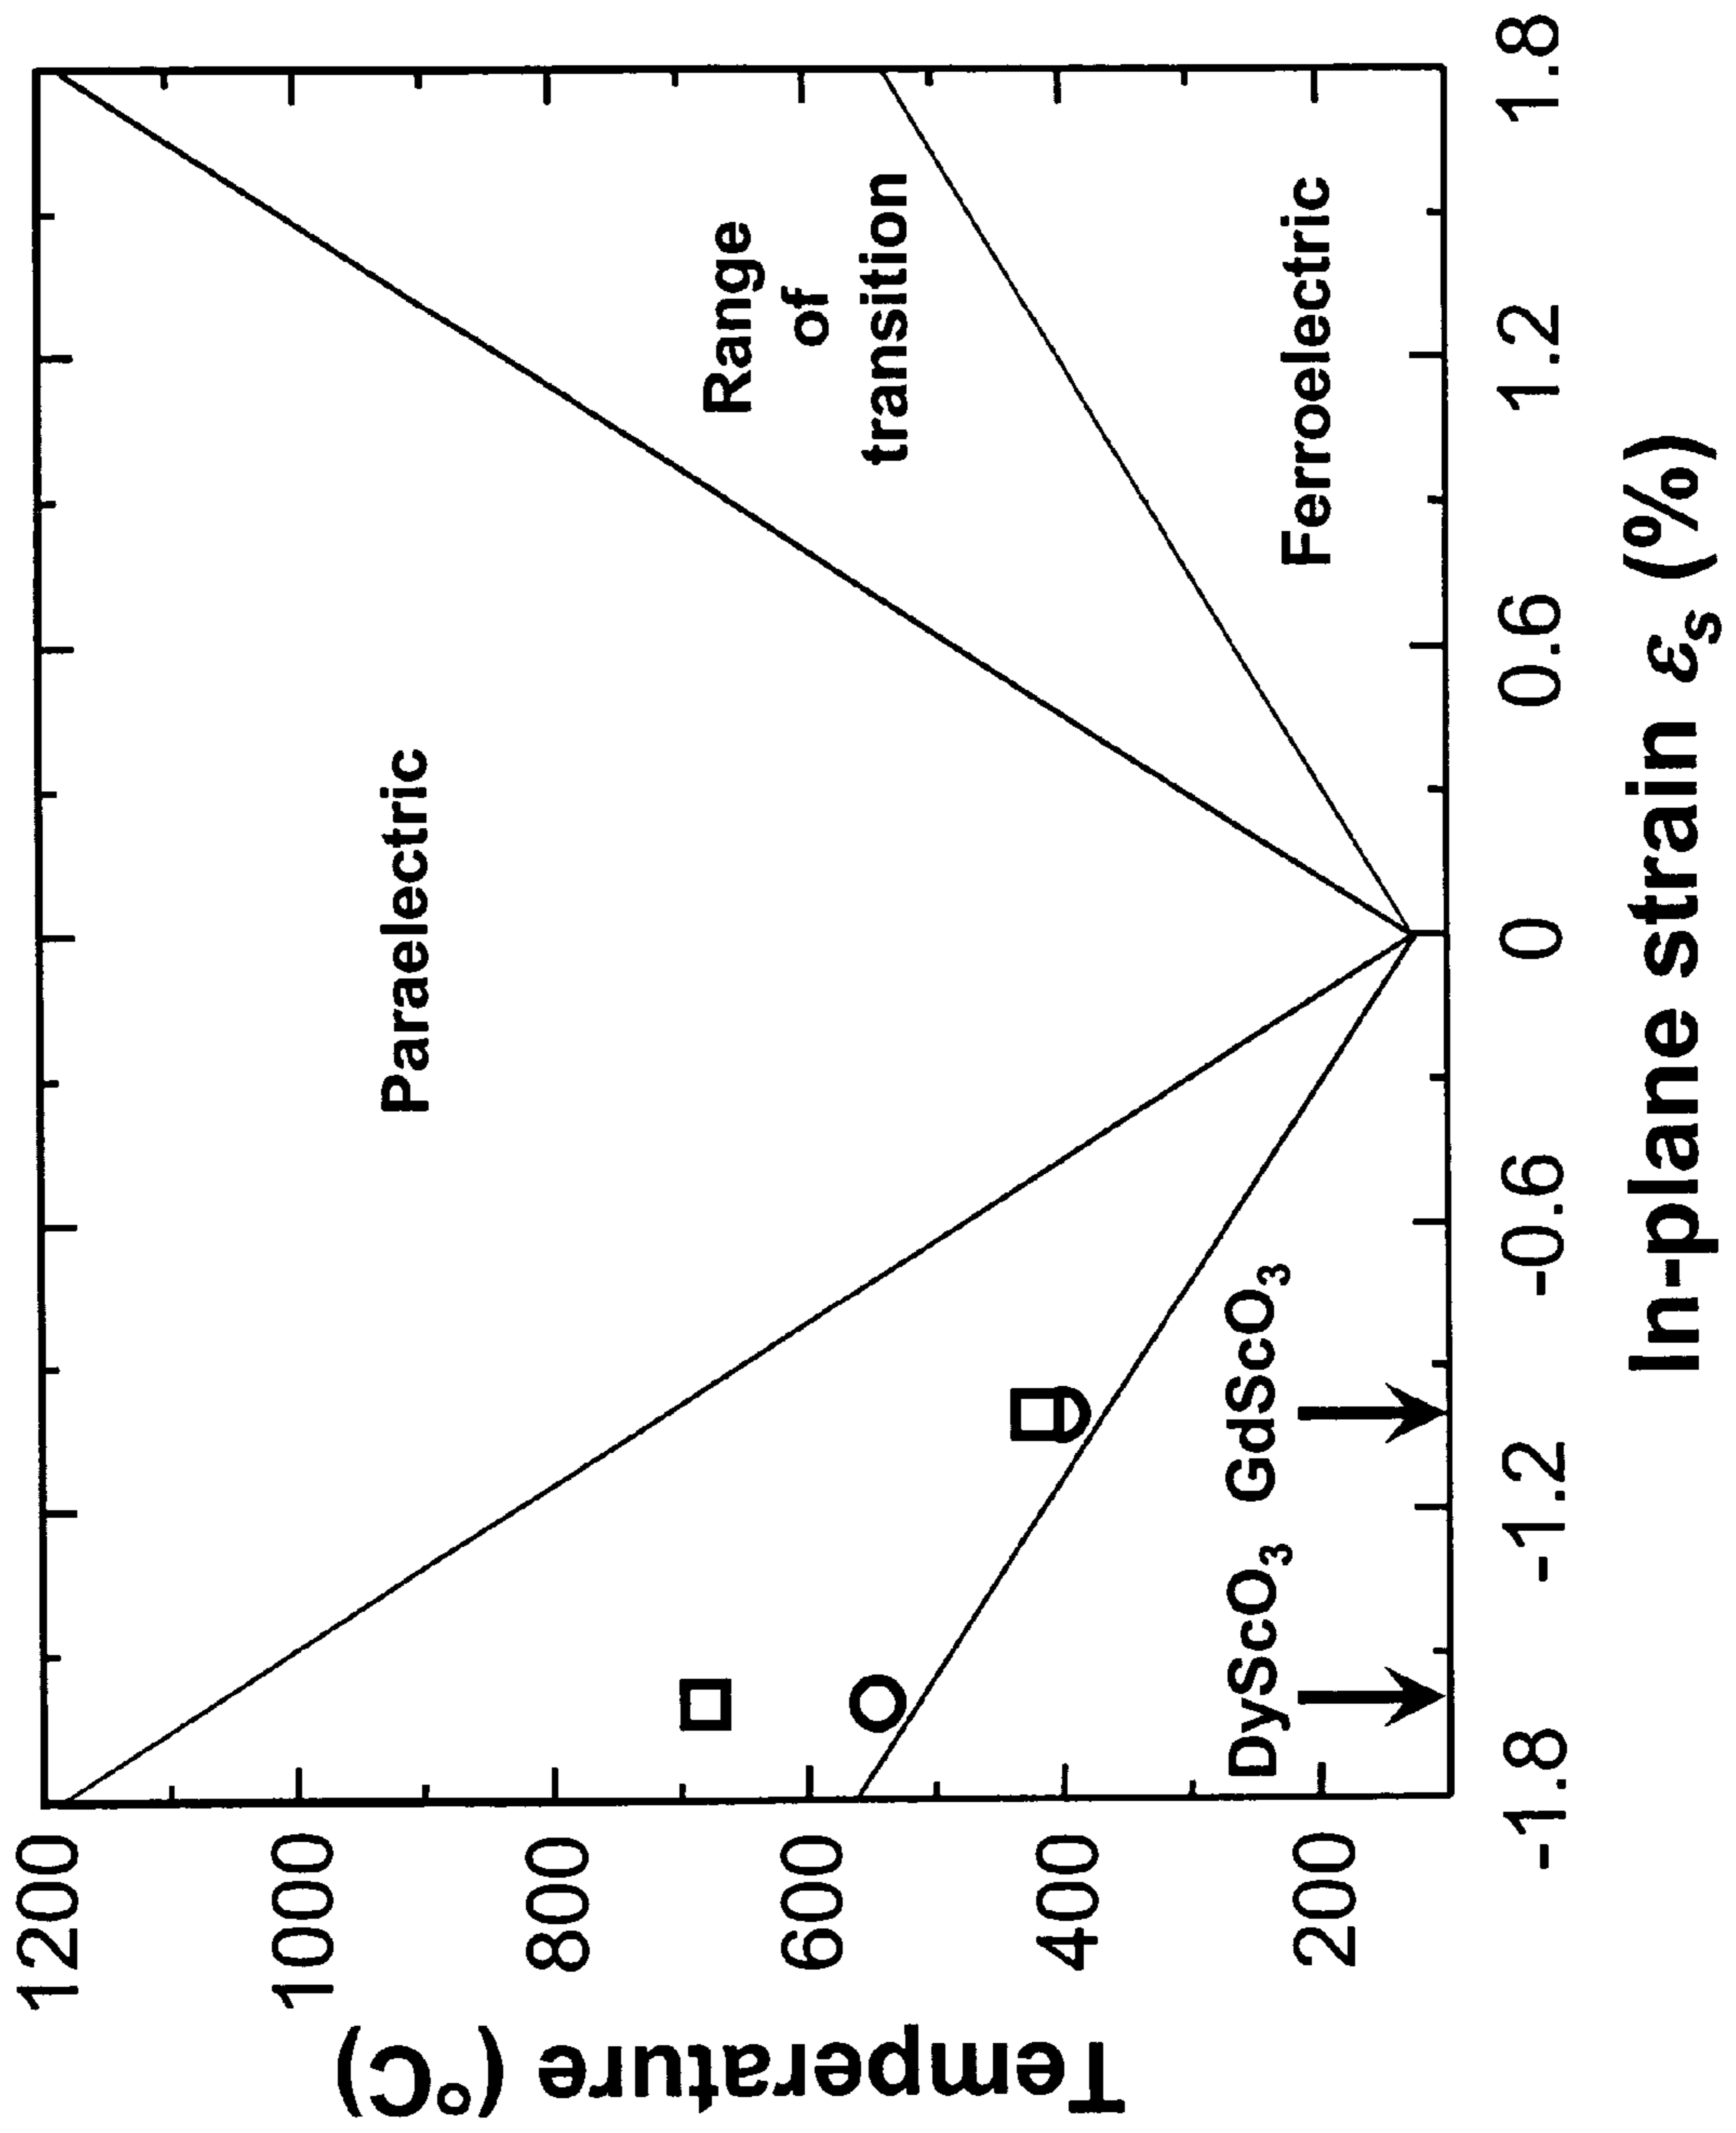


Fig. 1



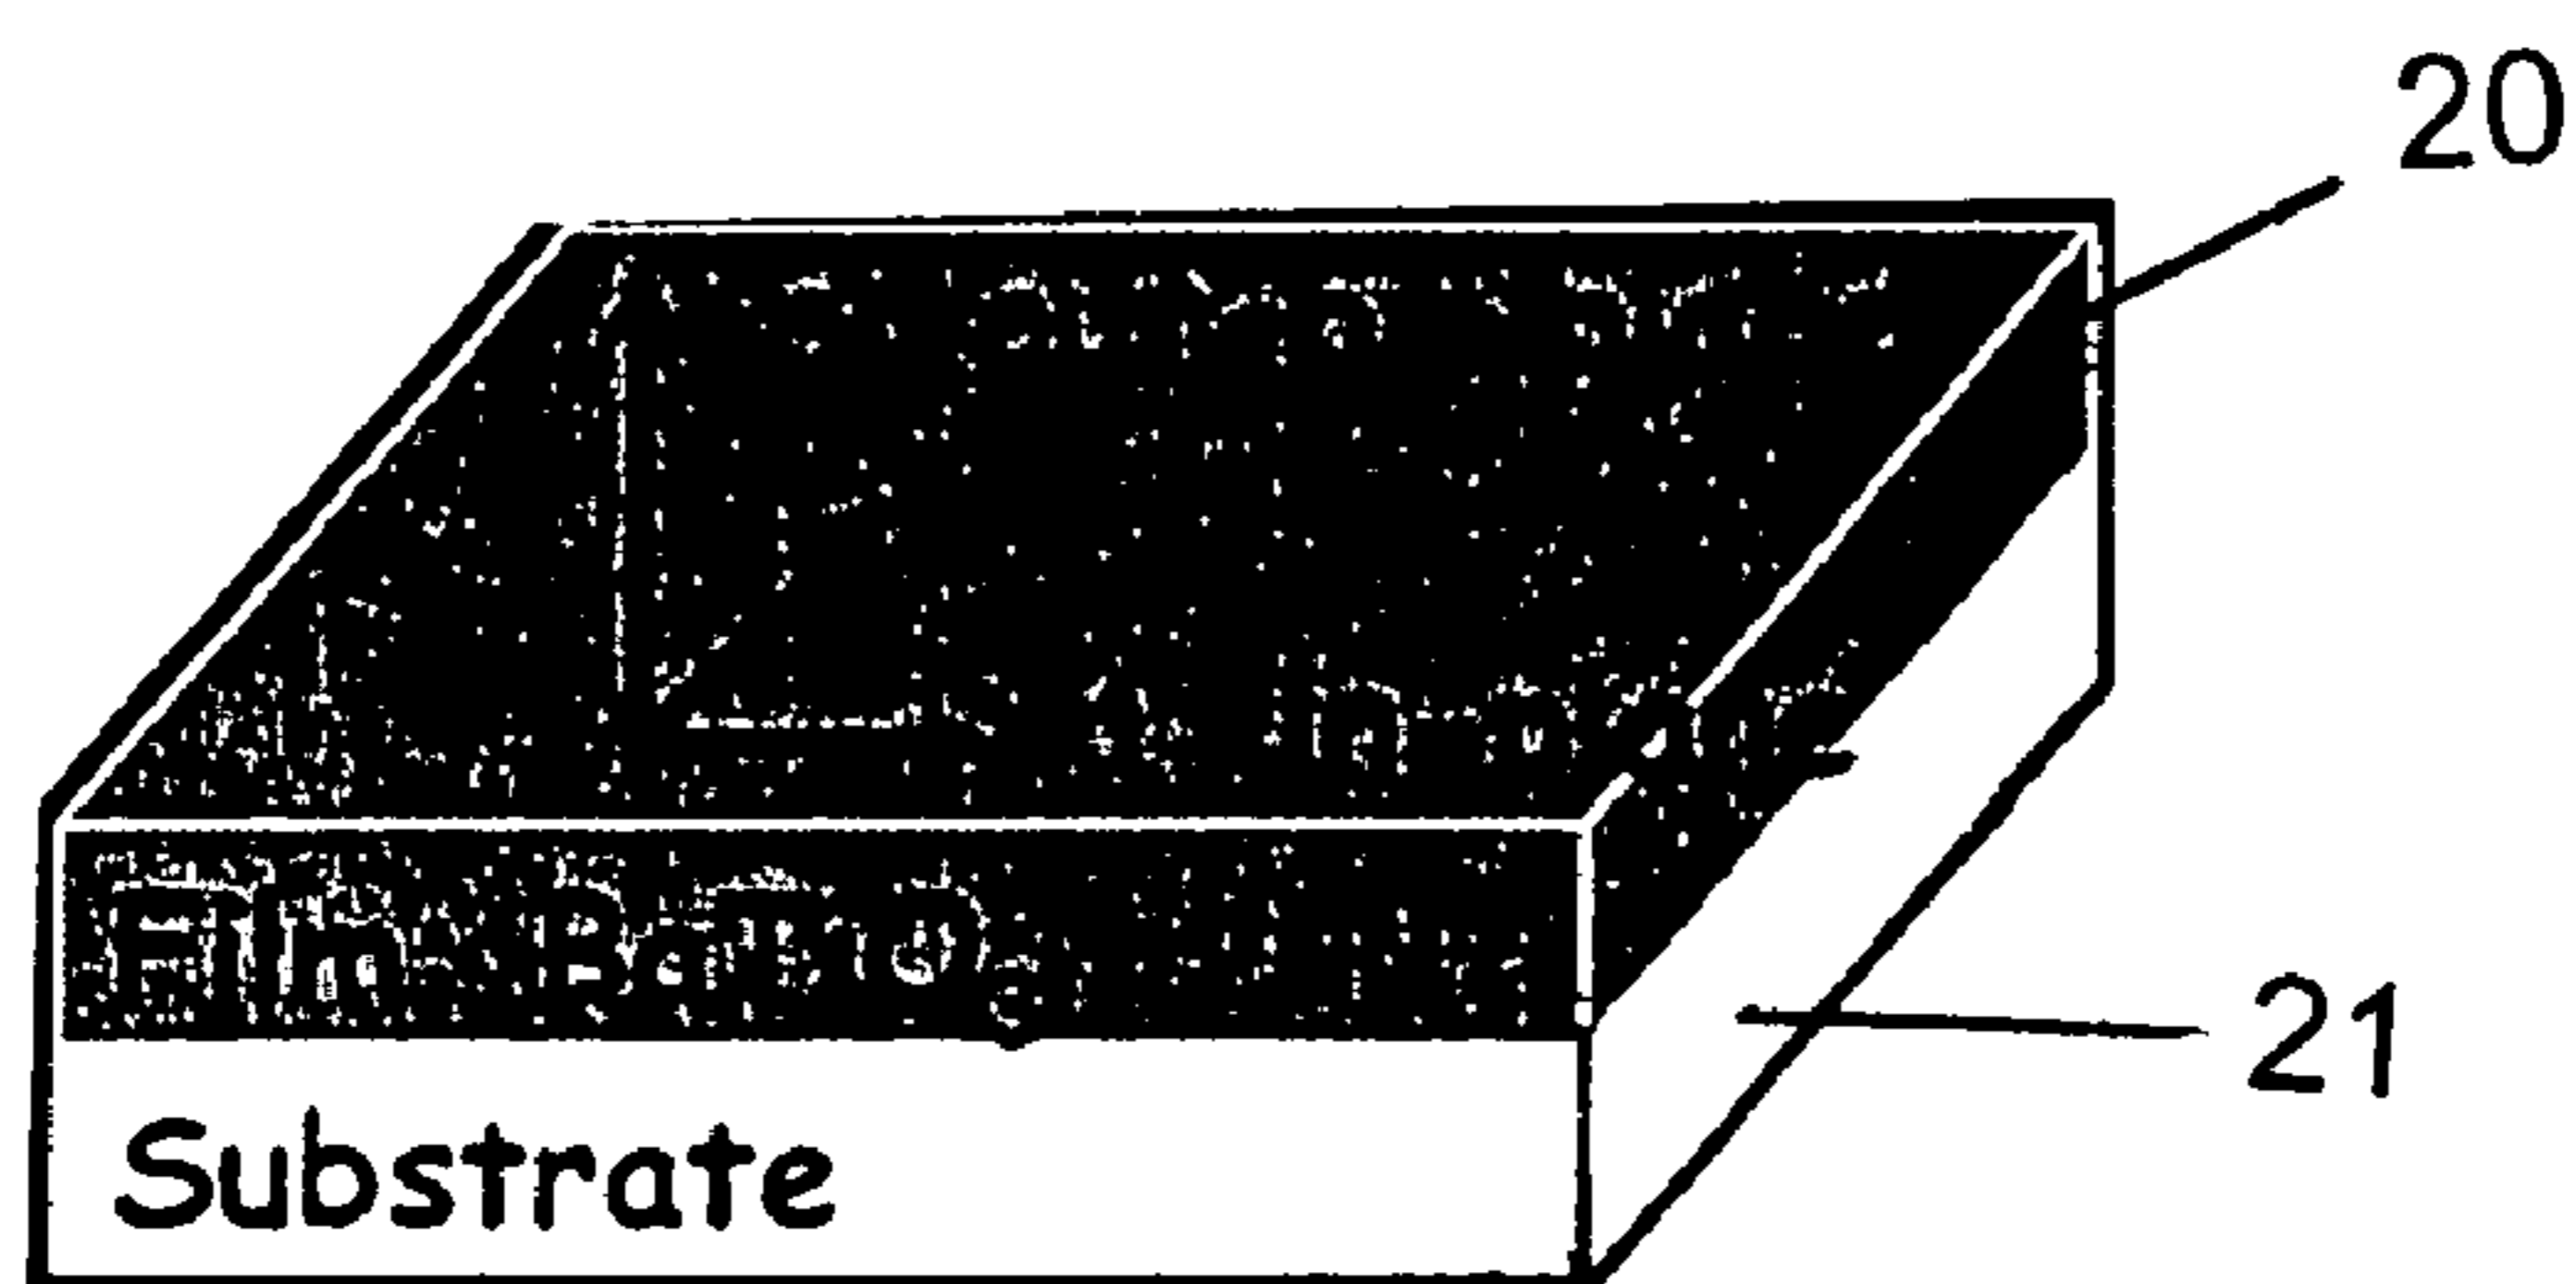


FIG. 2

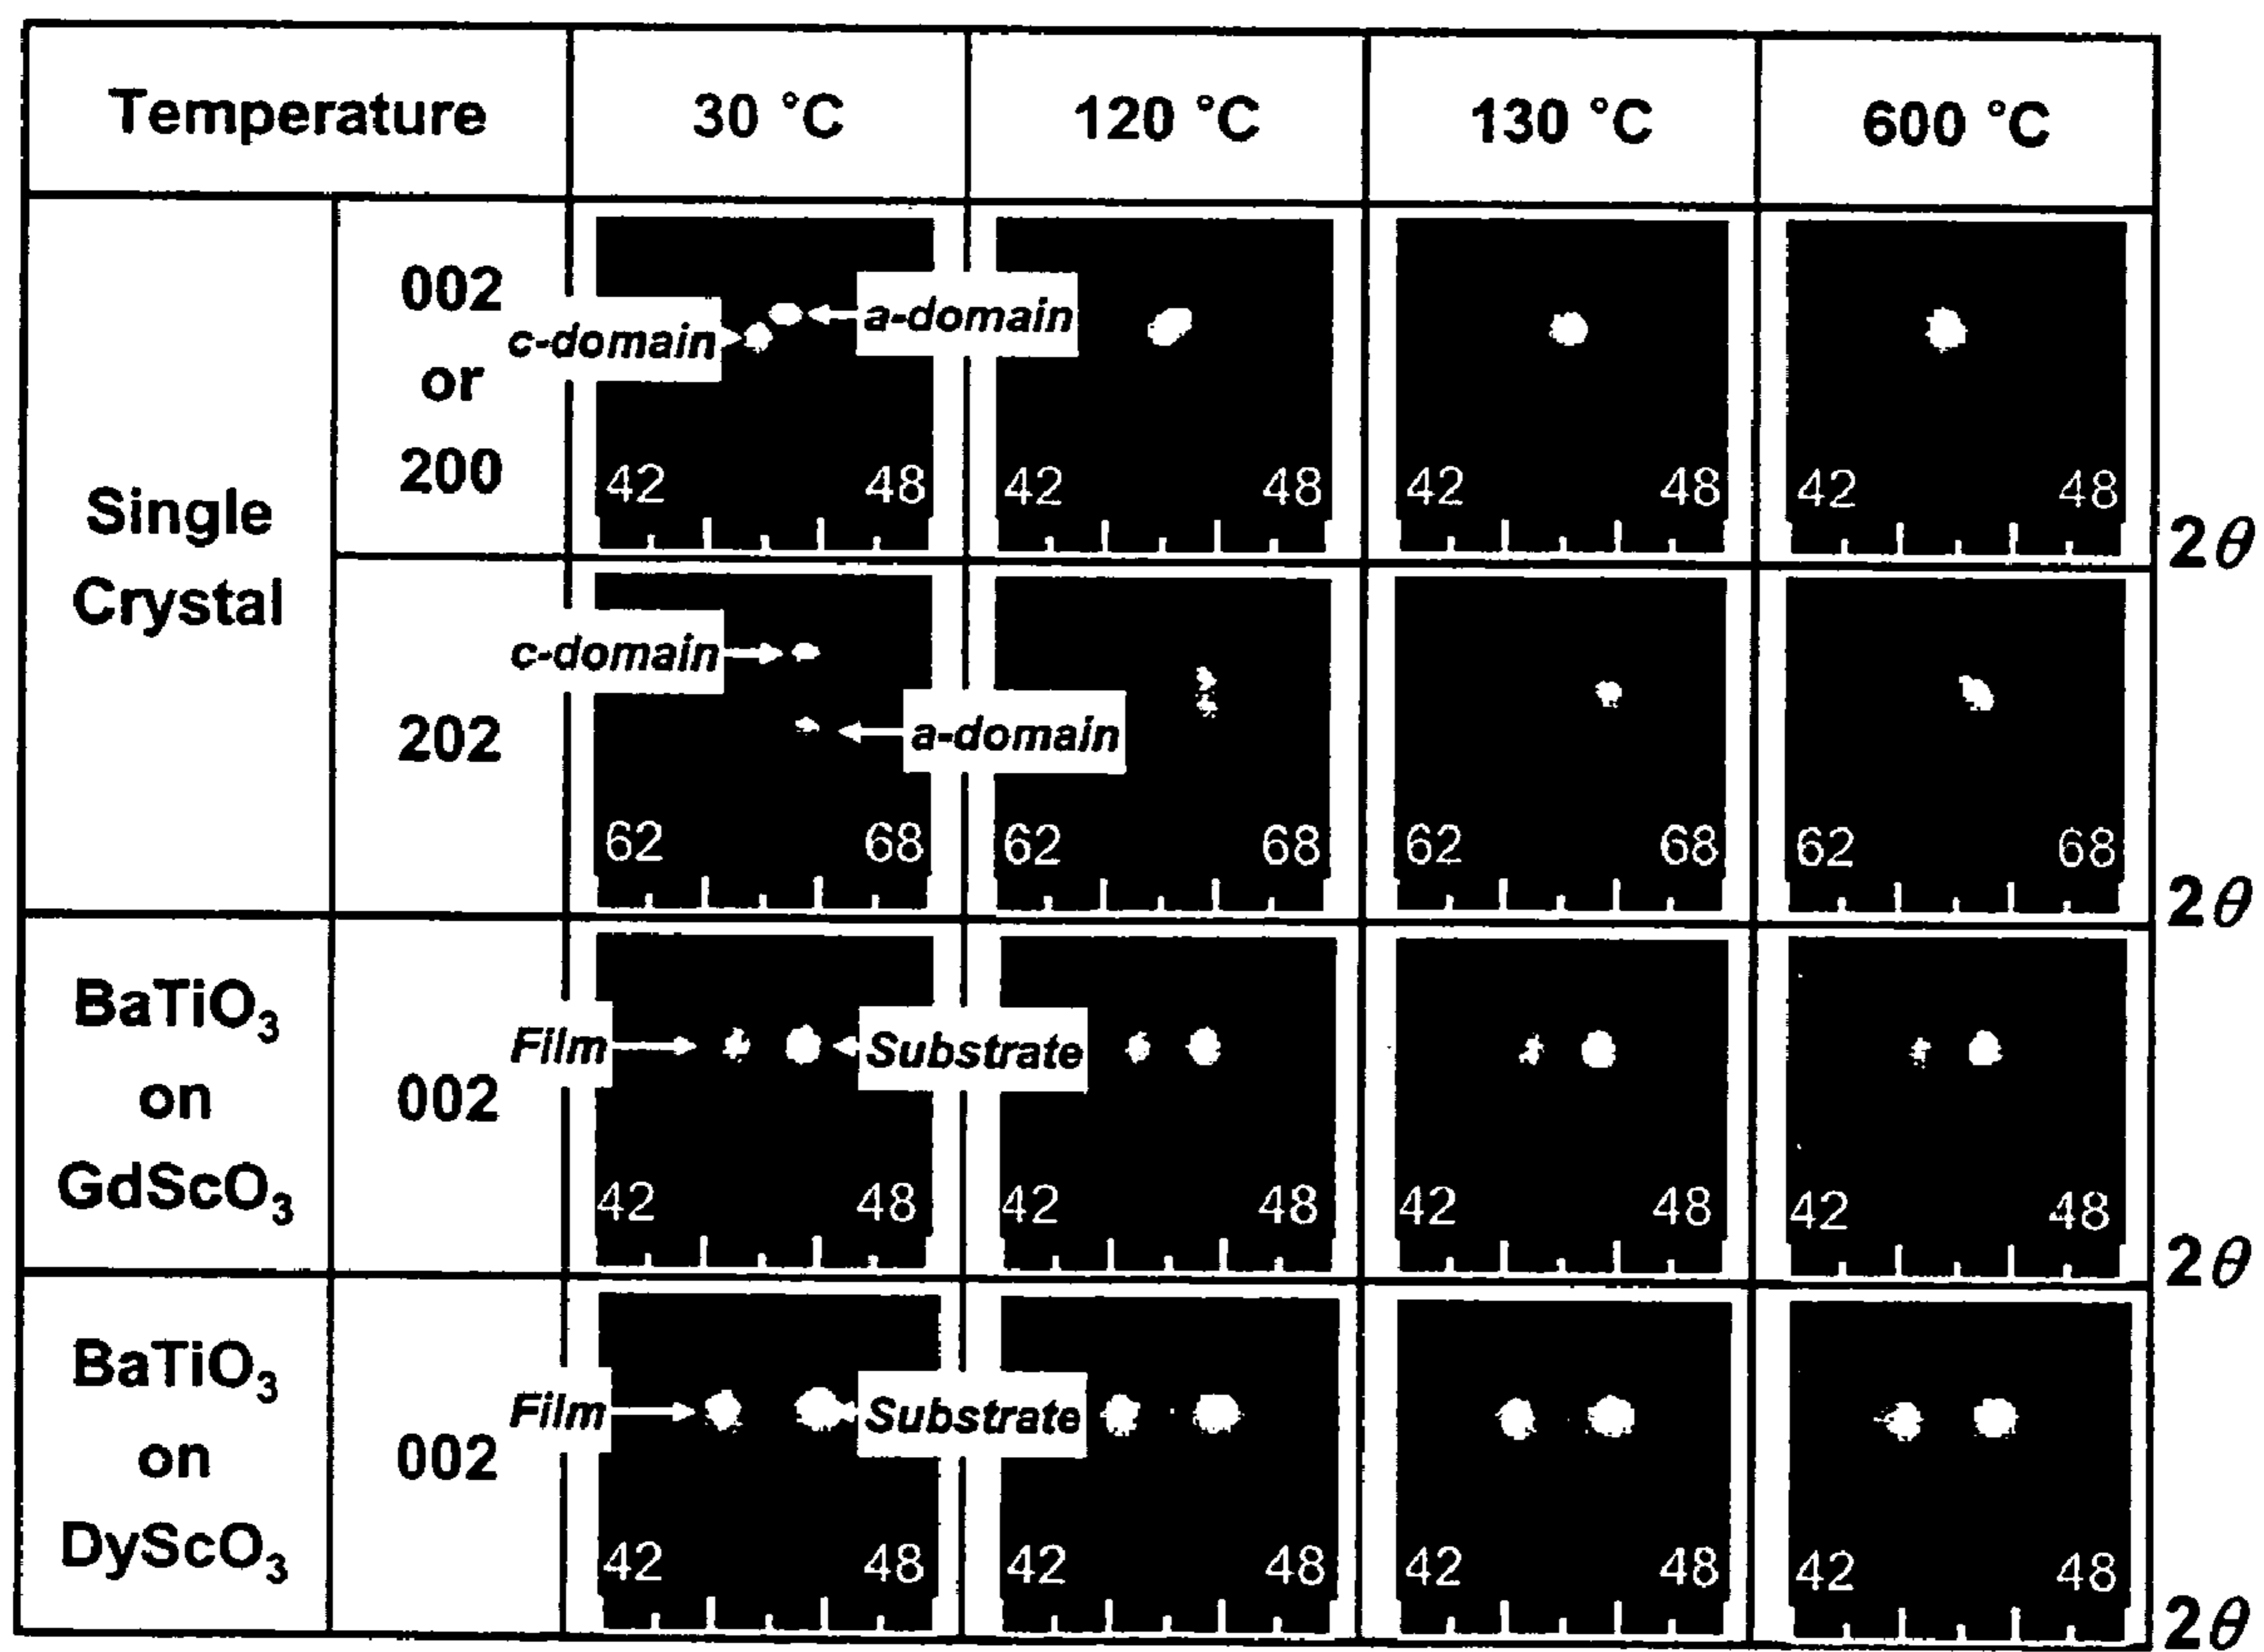


FIG. 3

FIG. 4

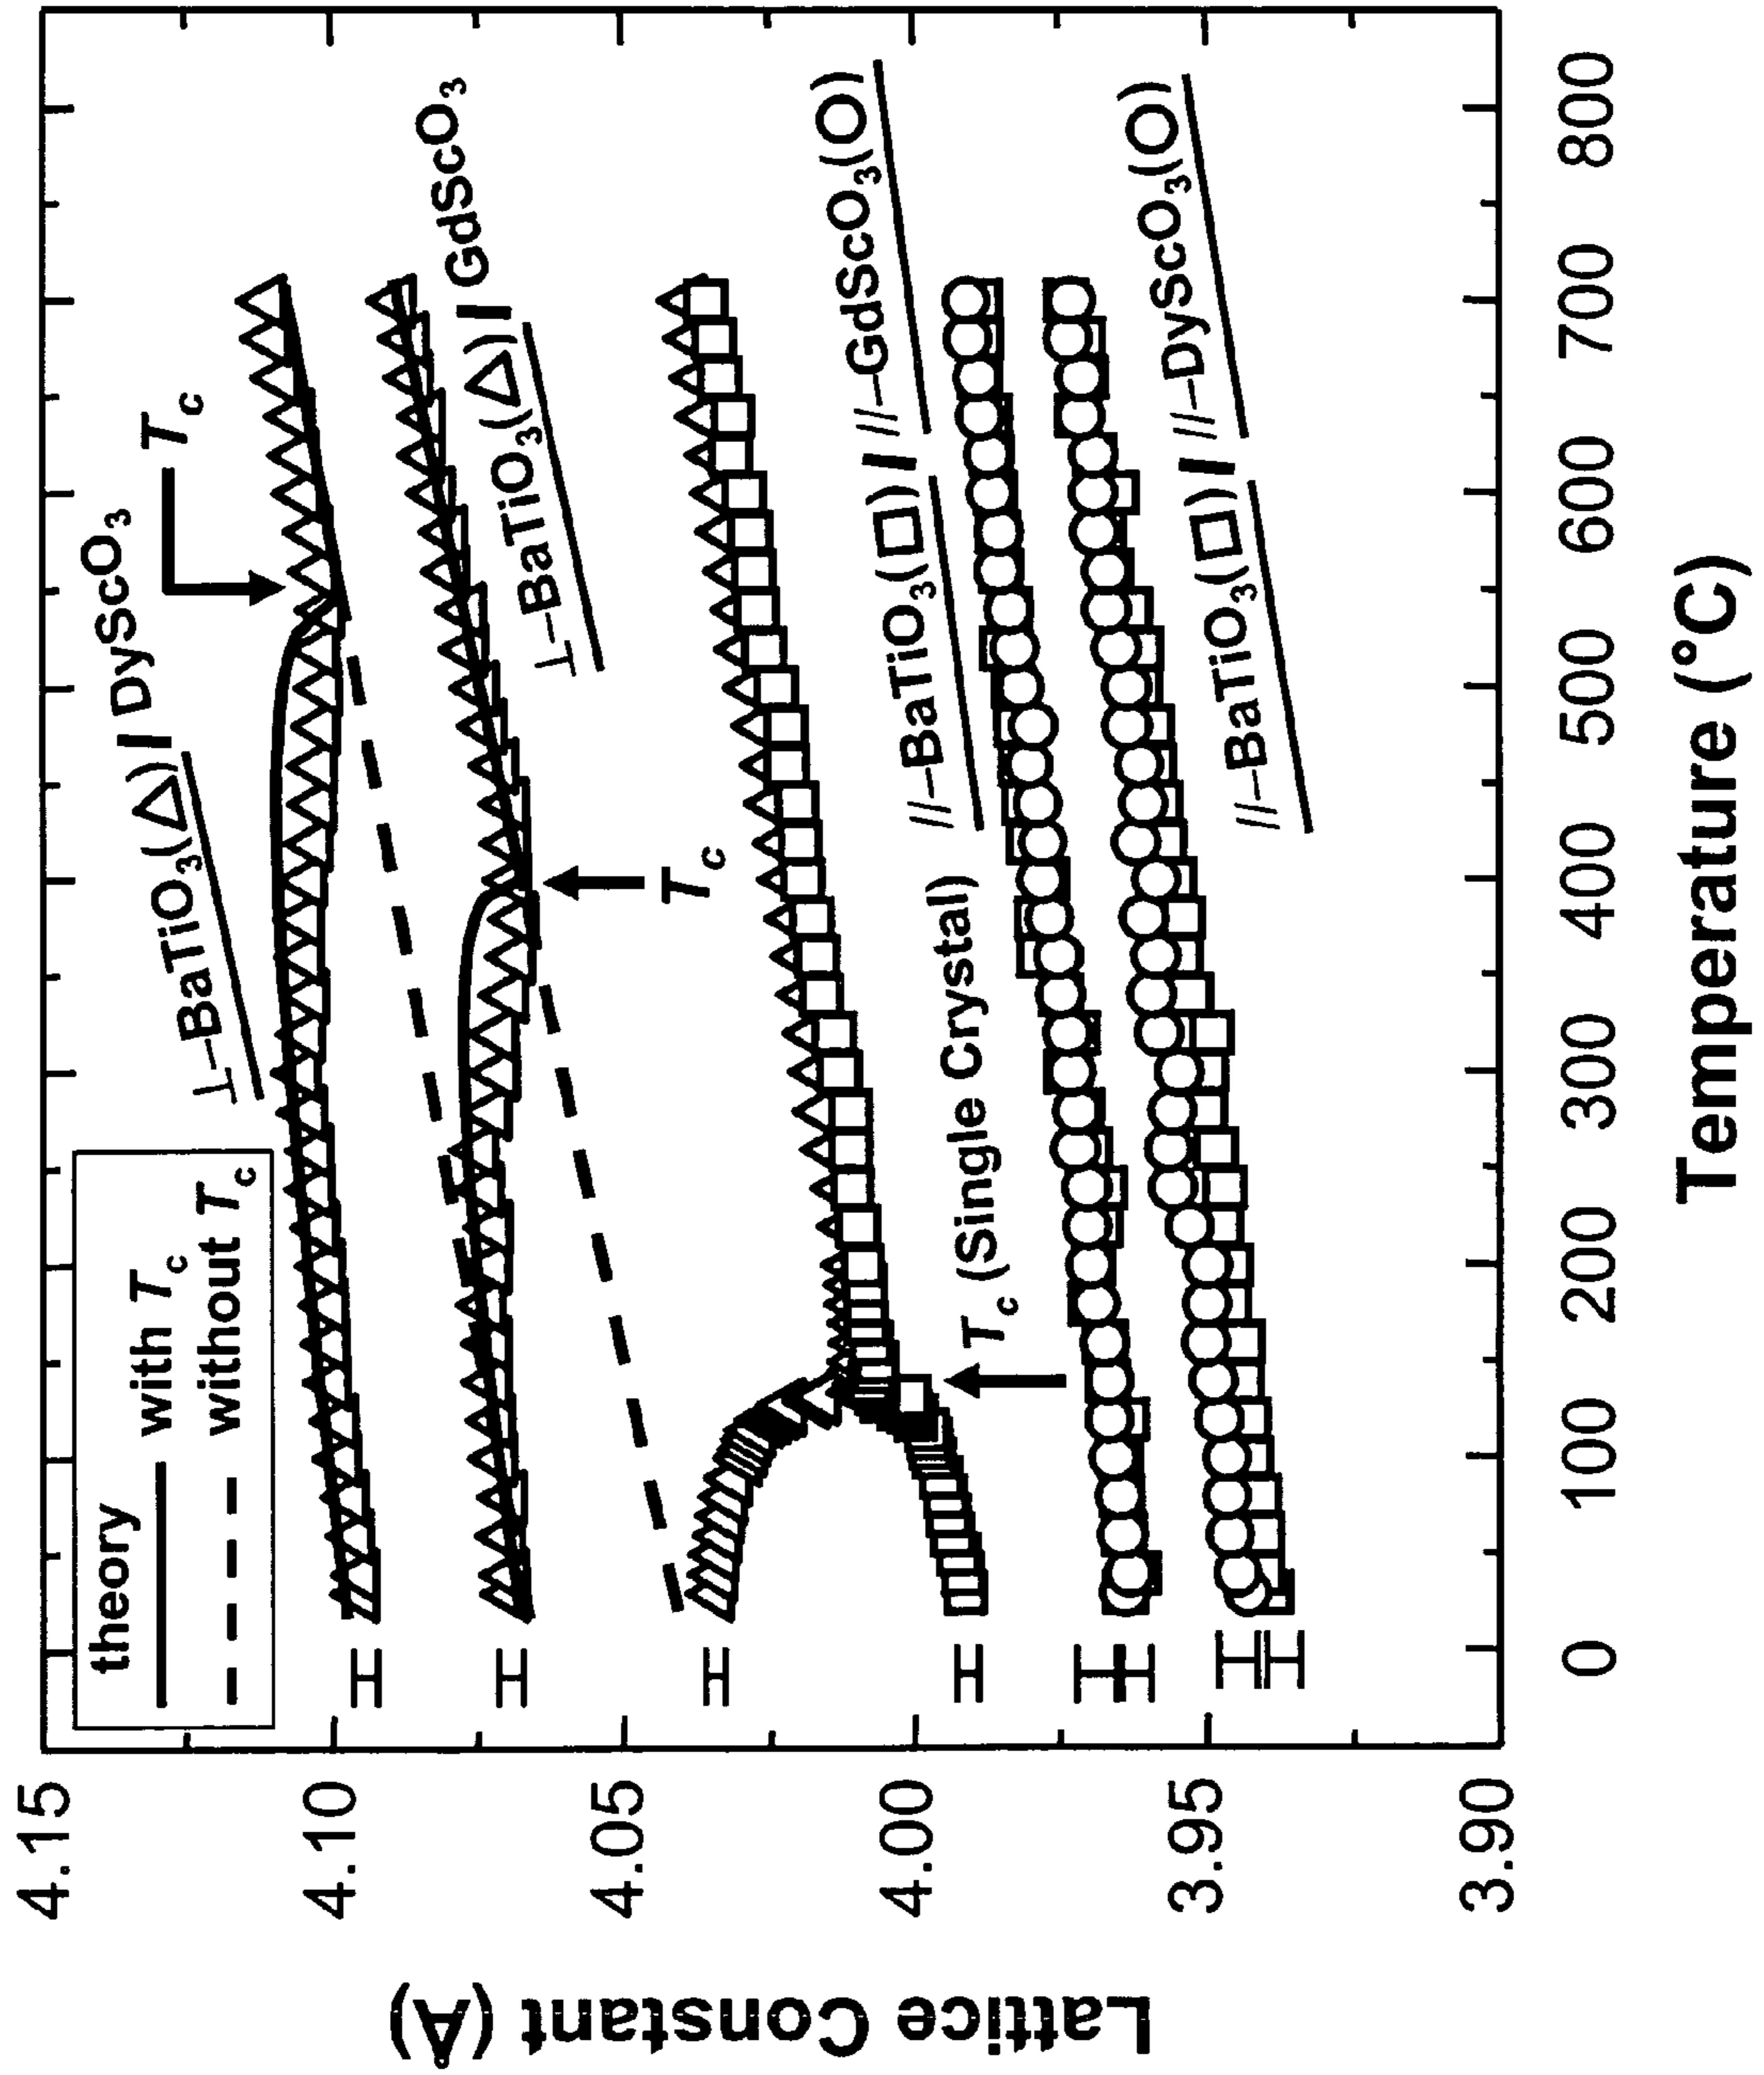


FIG. 5

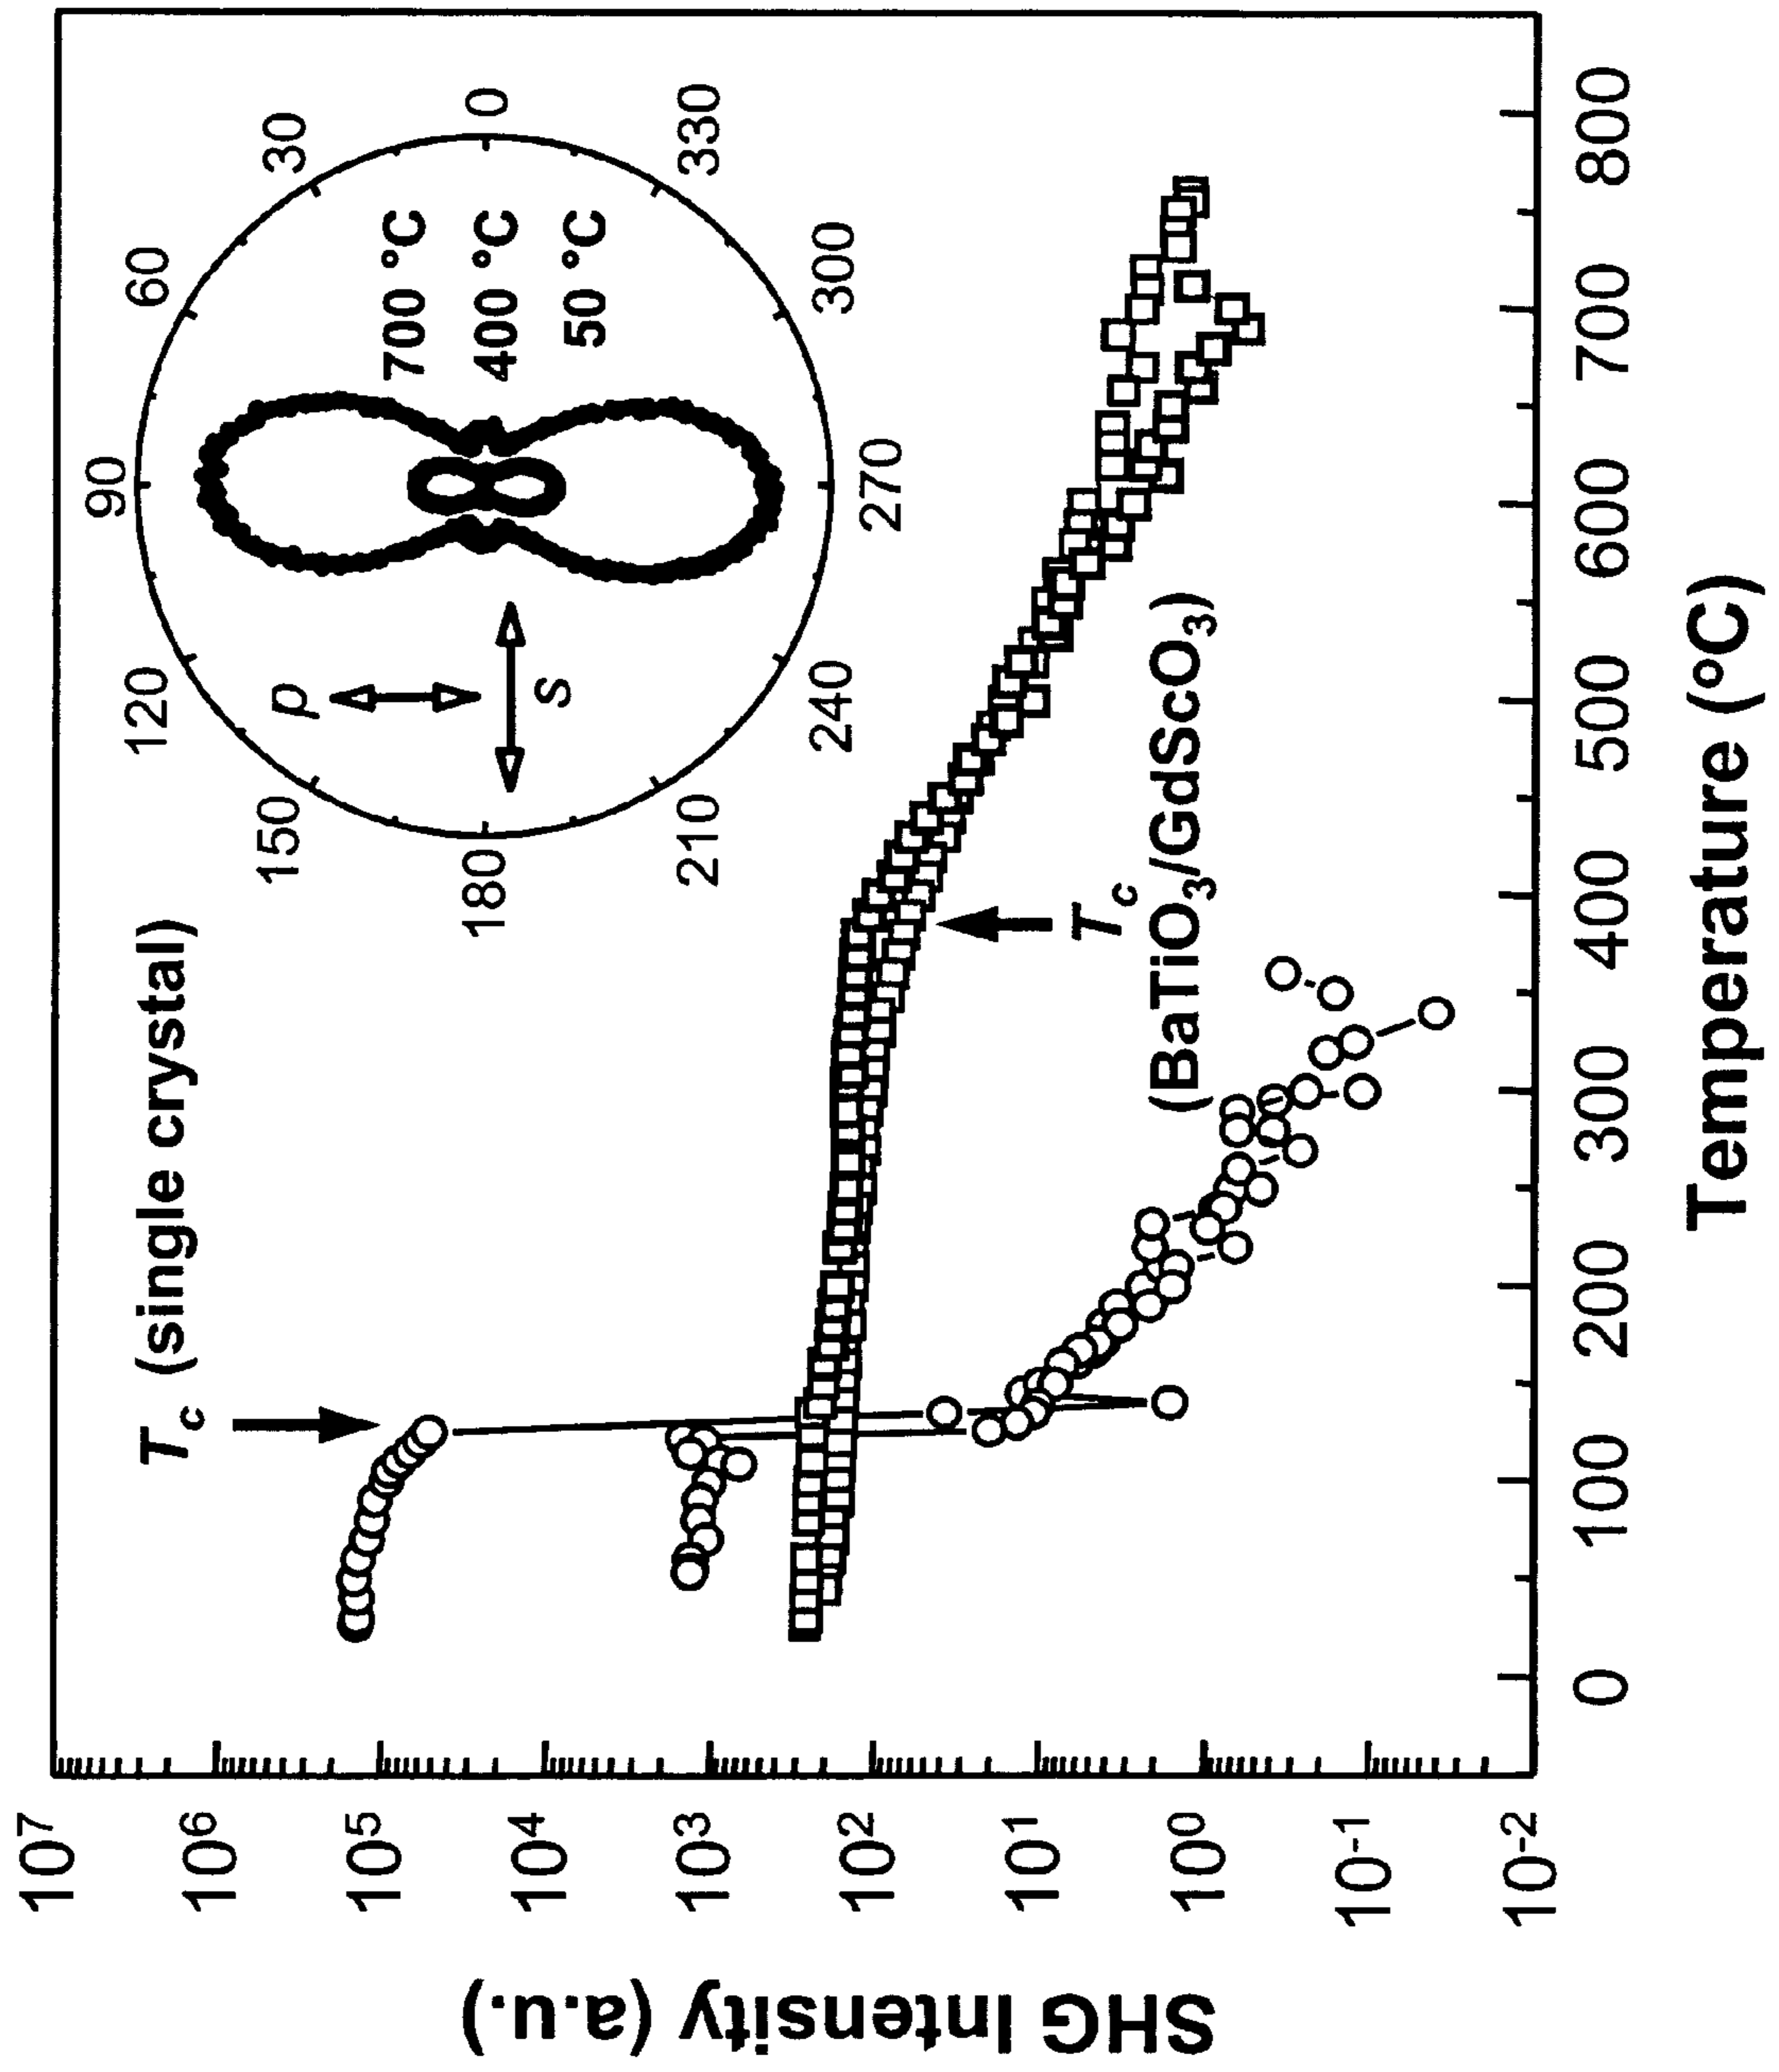


FIG. 6

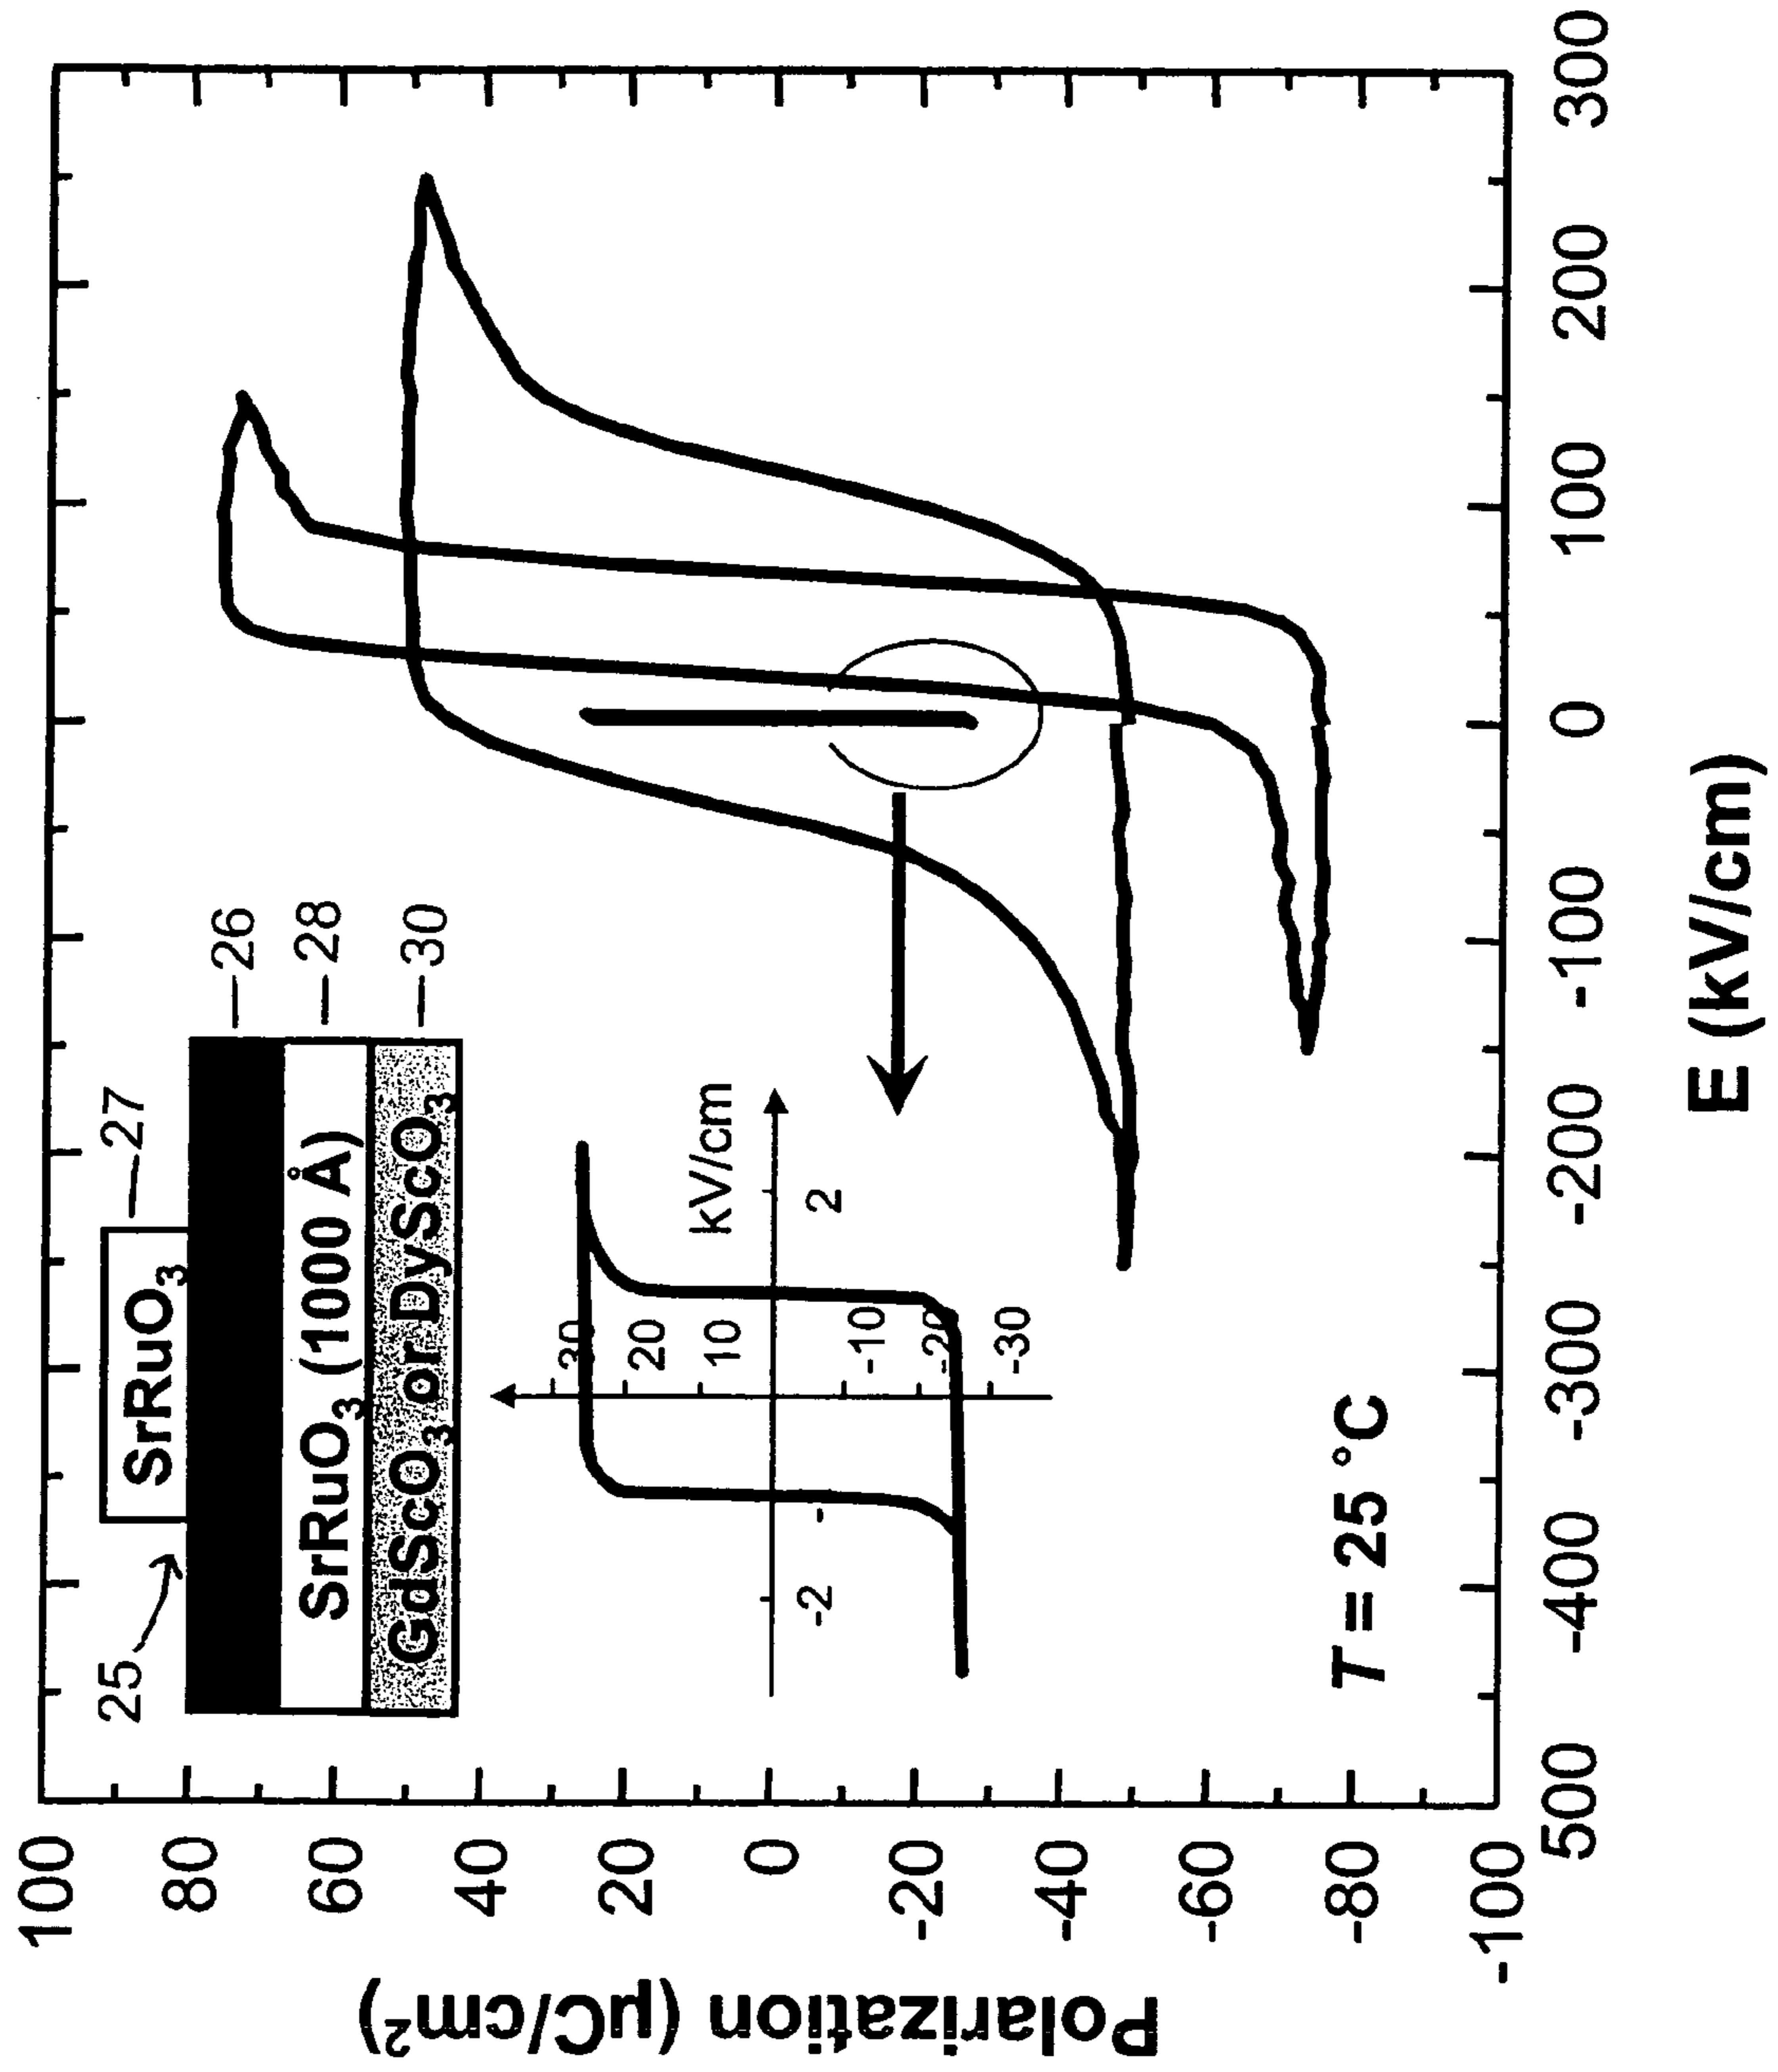


FIG. 7

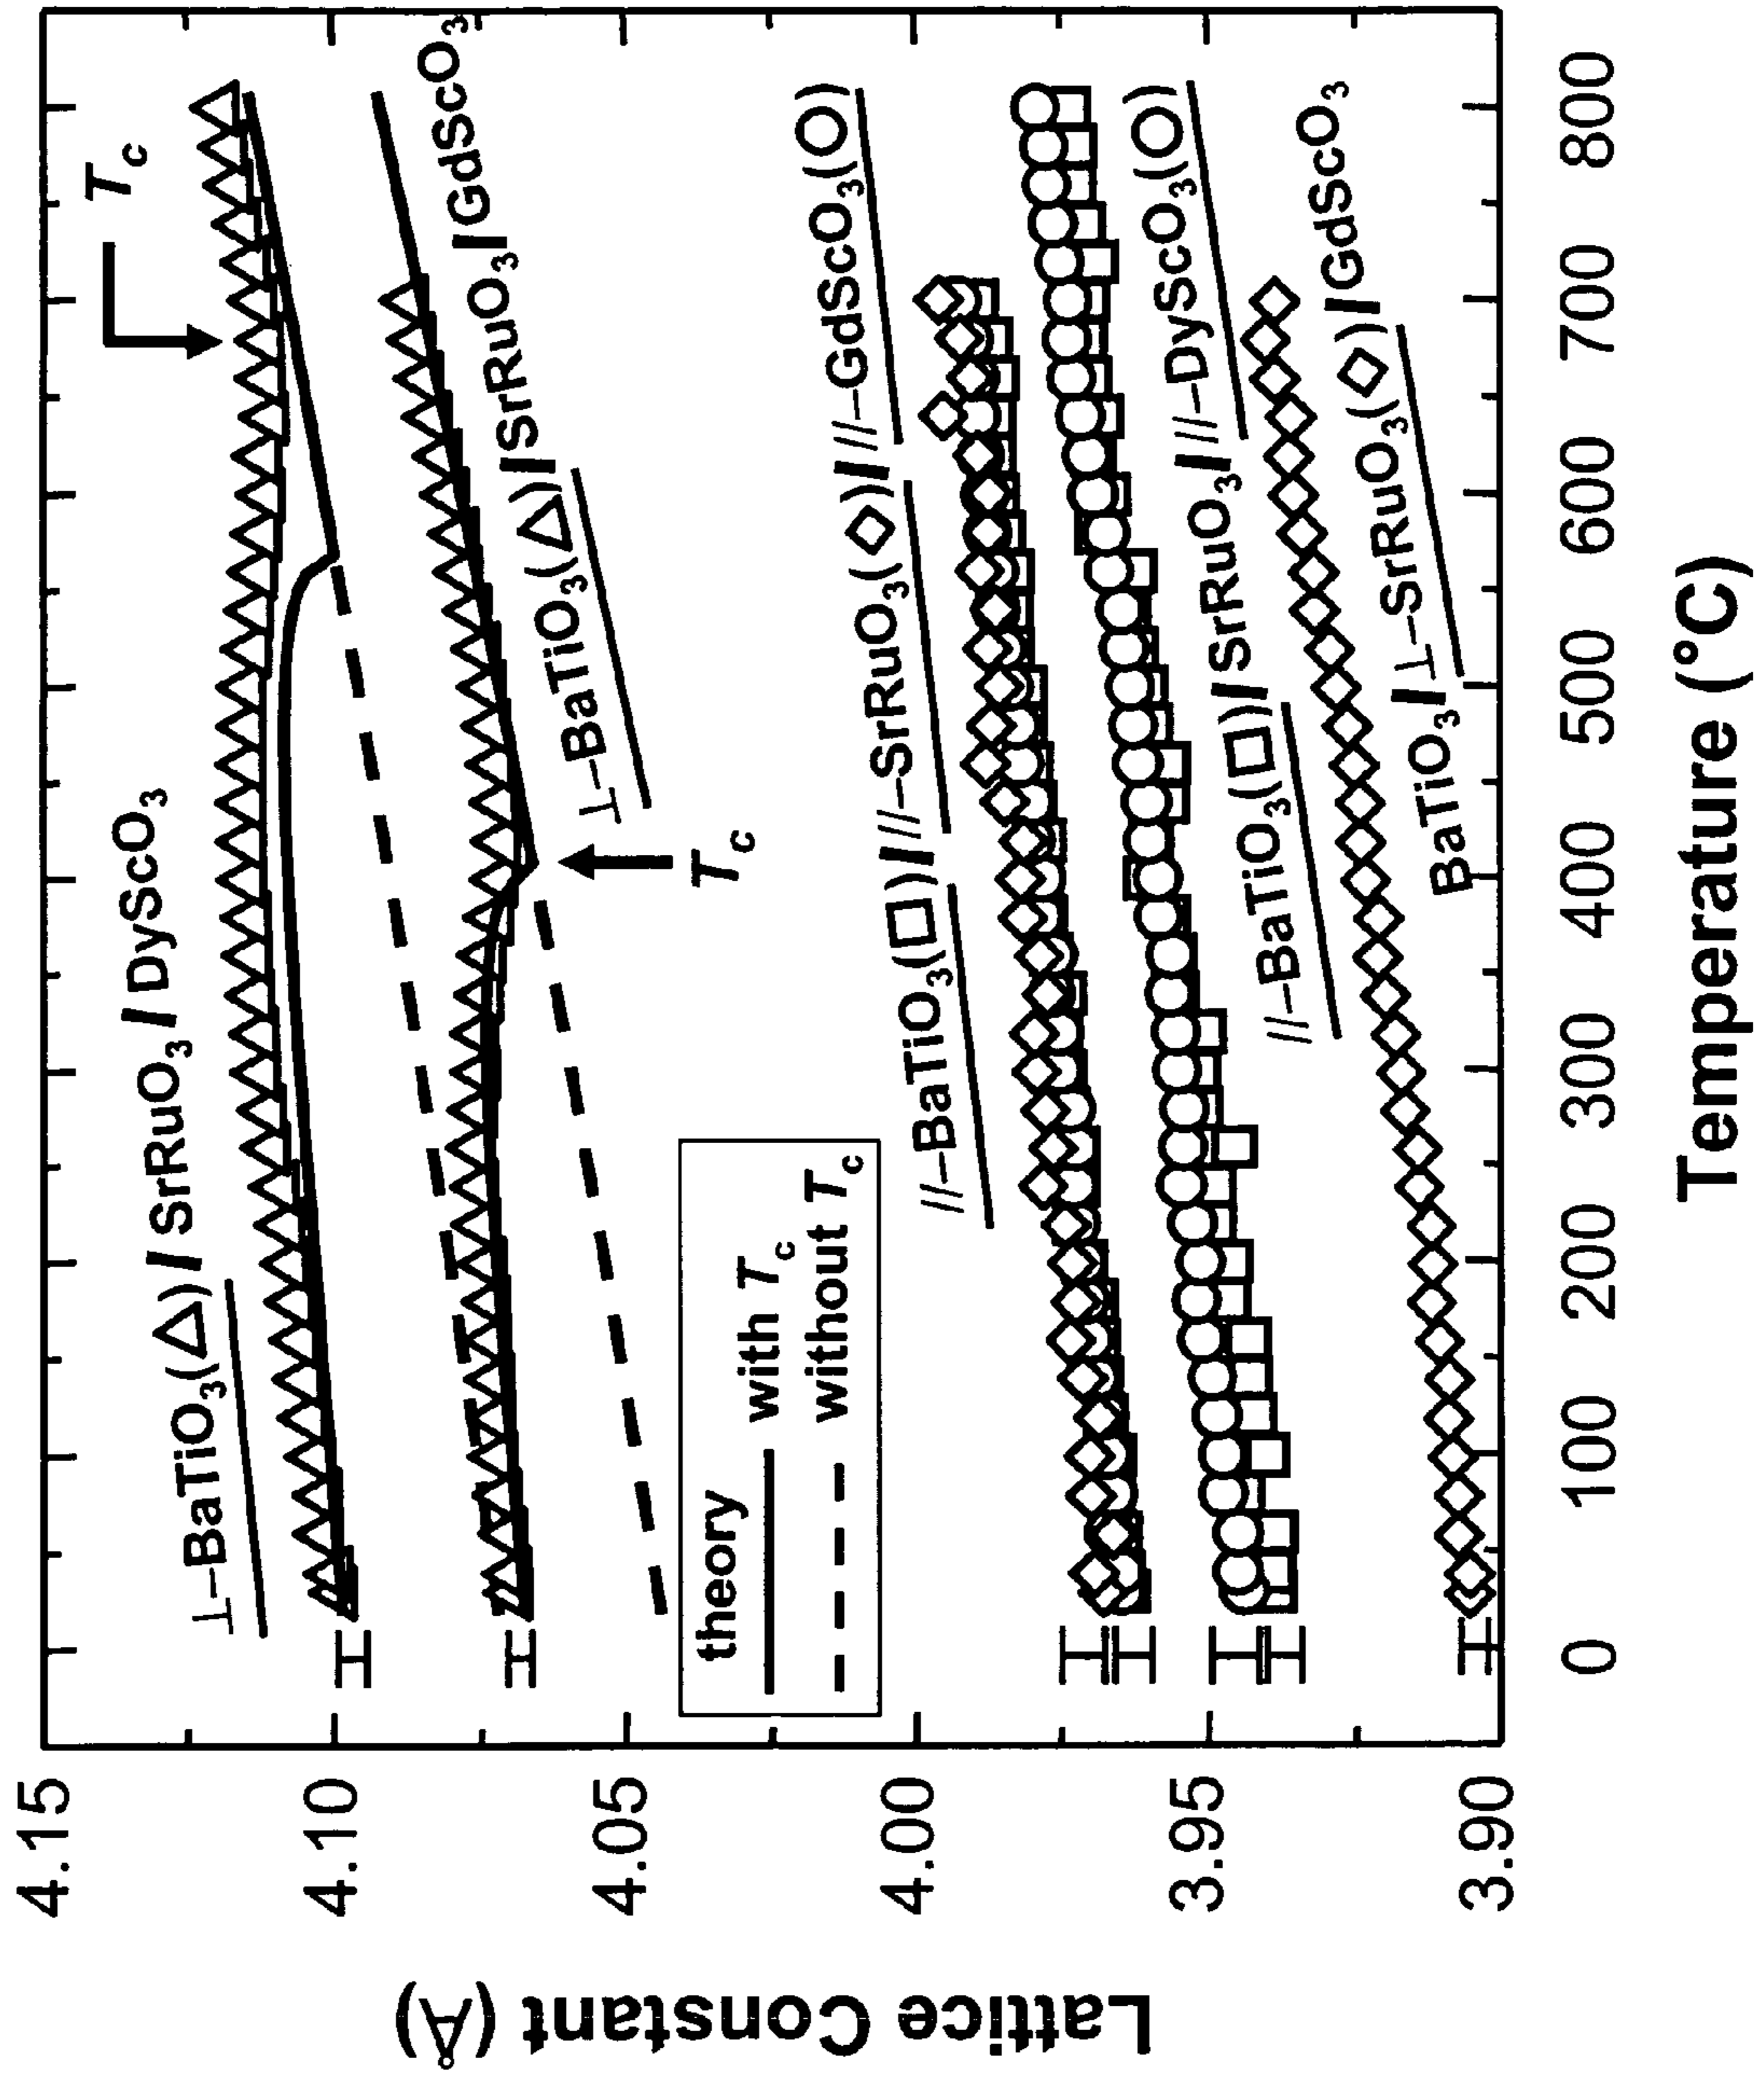




FIG. 8

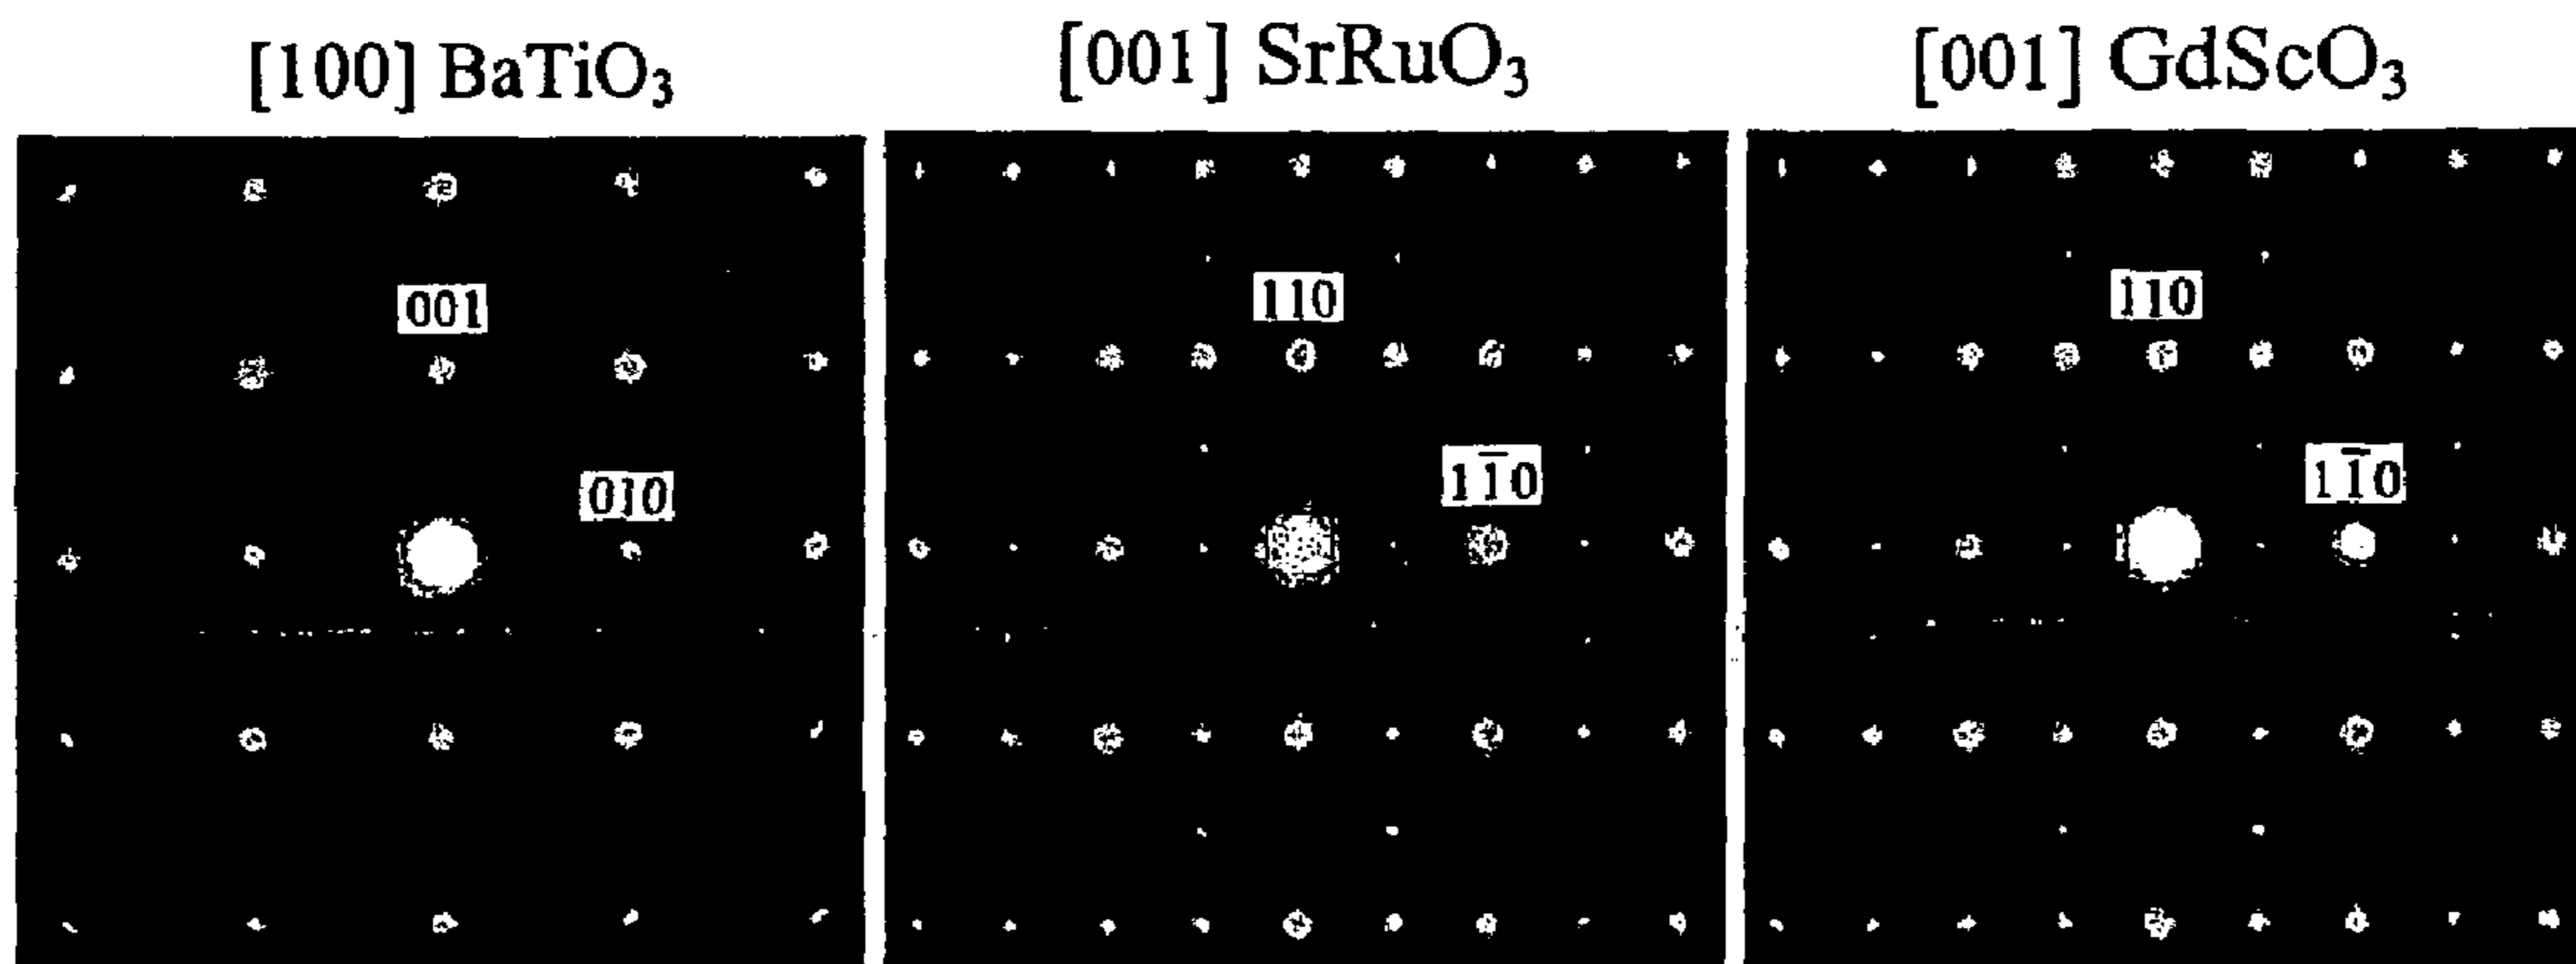


FIG. 9

FIG. 10

FIG. 11

FIG. 12

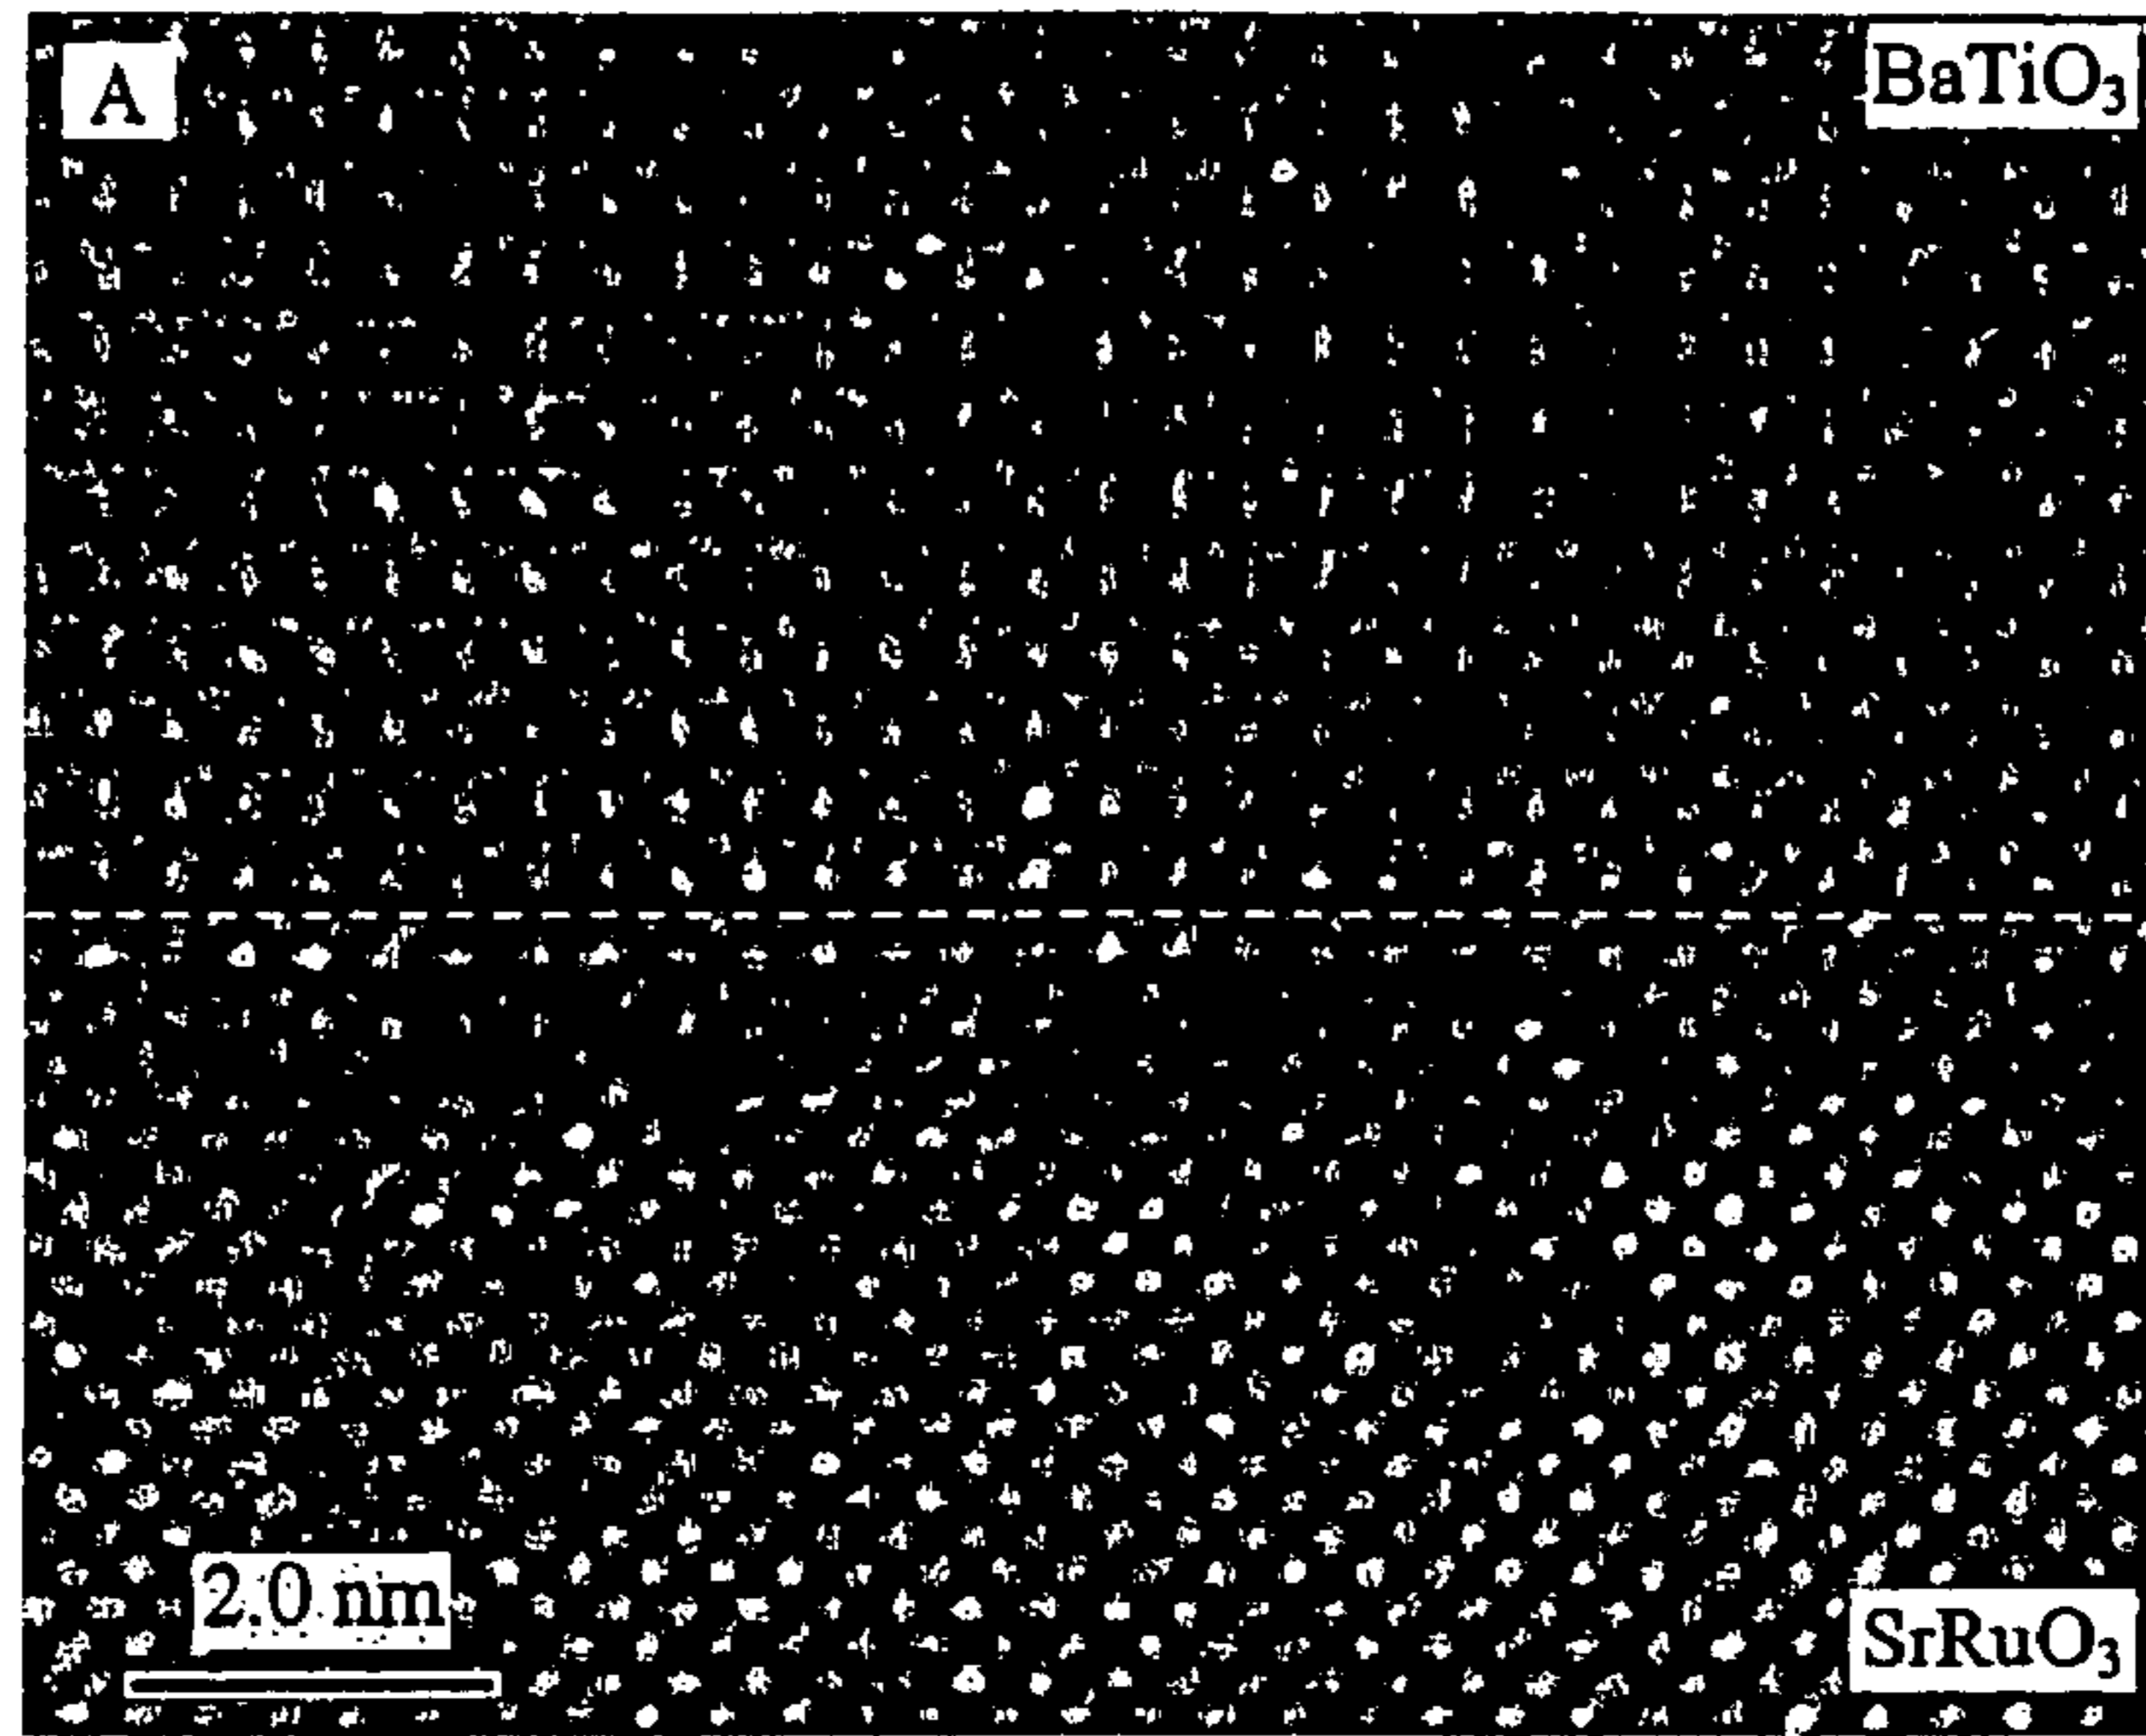


FIG. 13


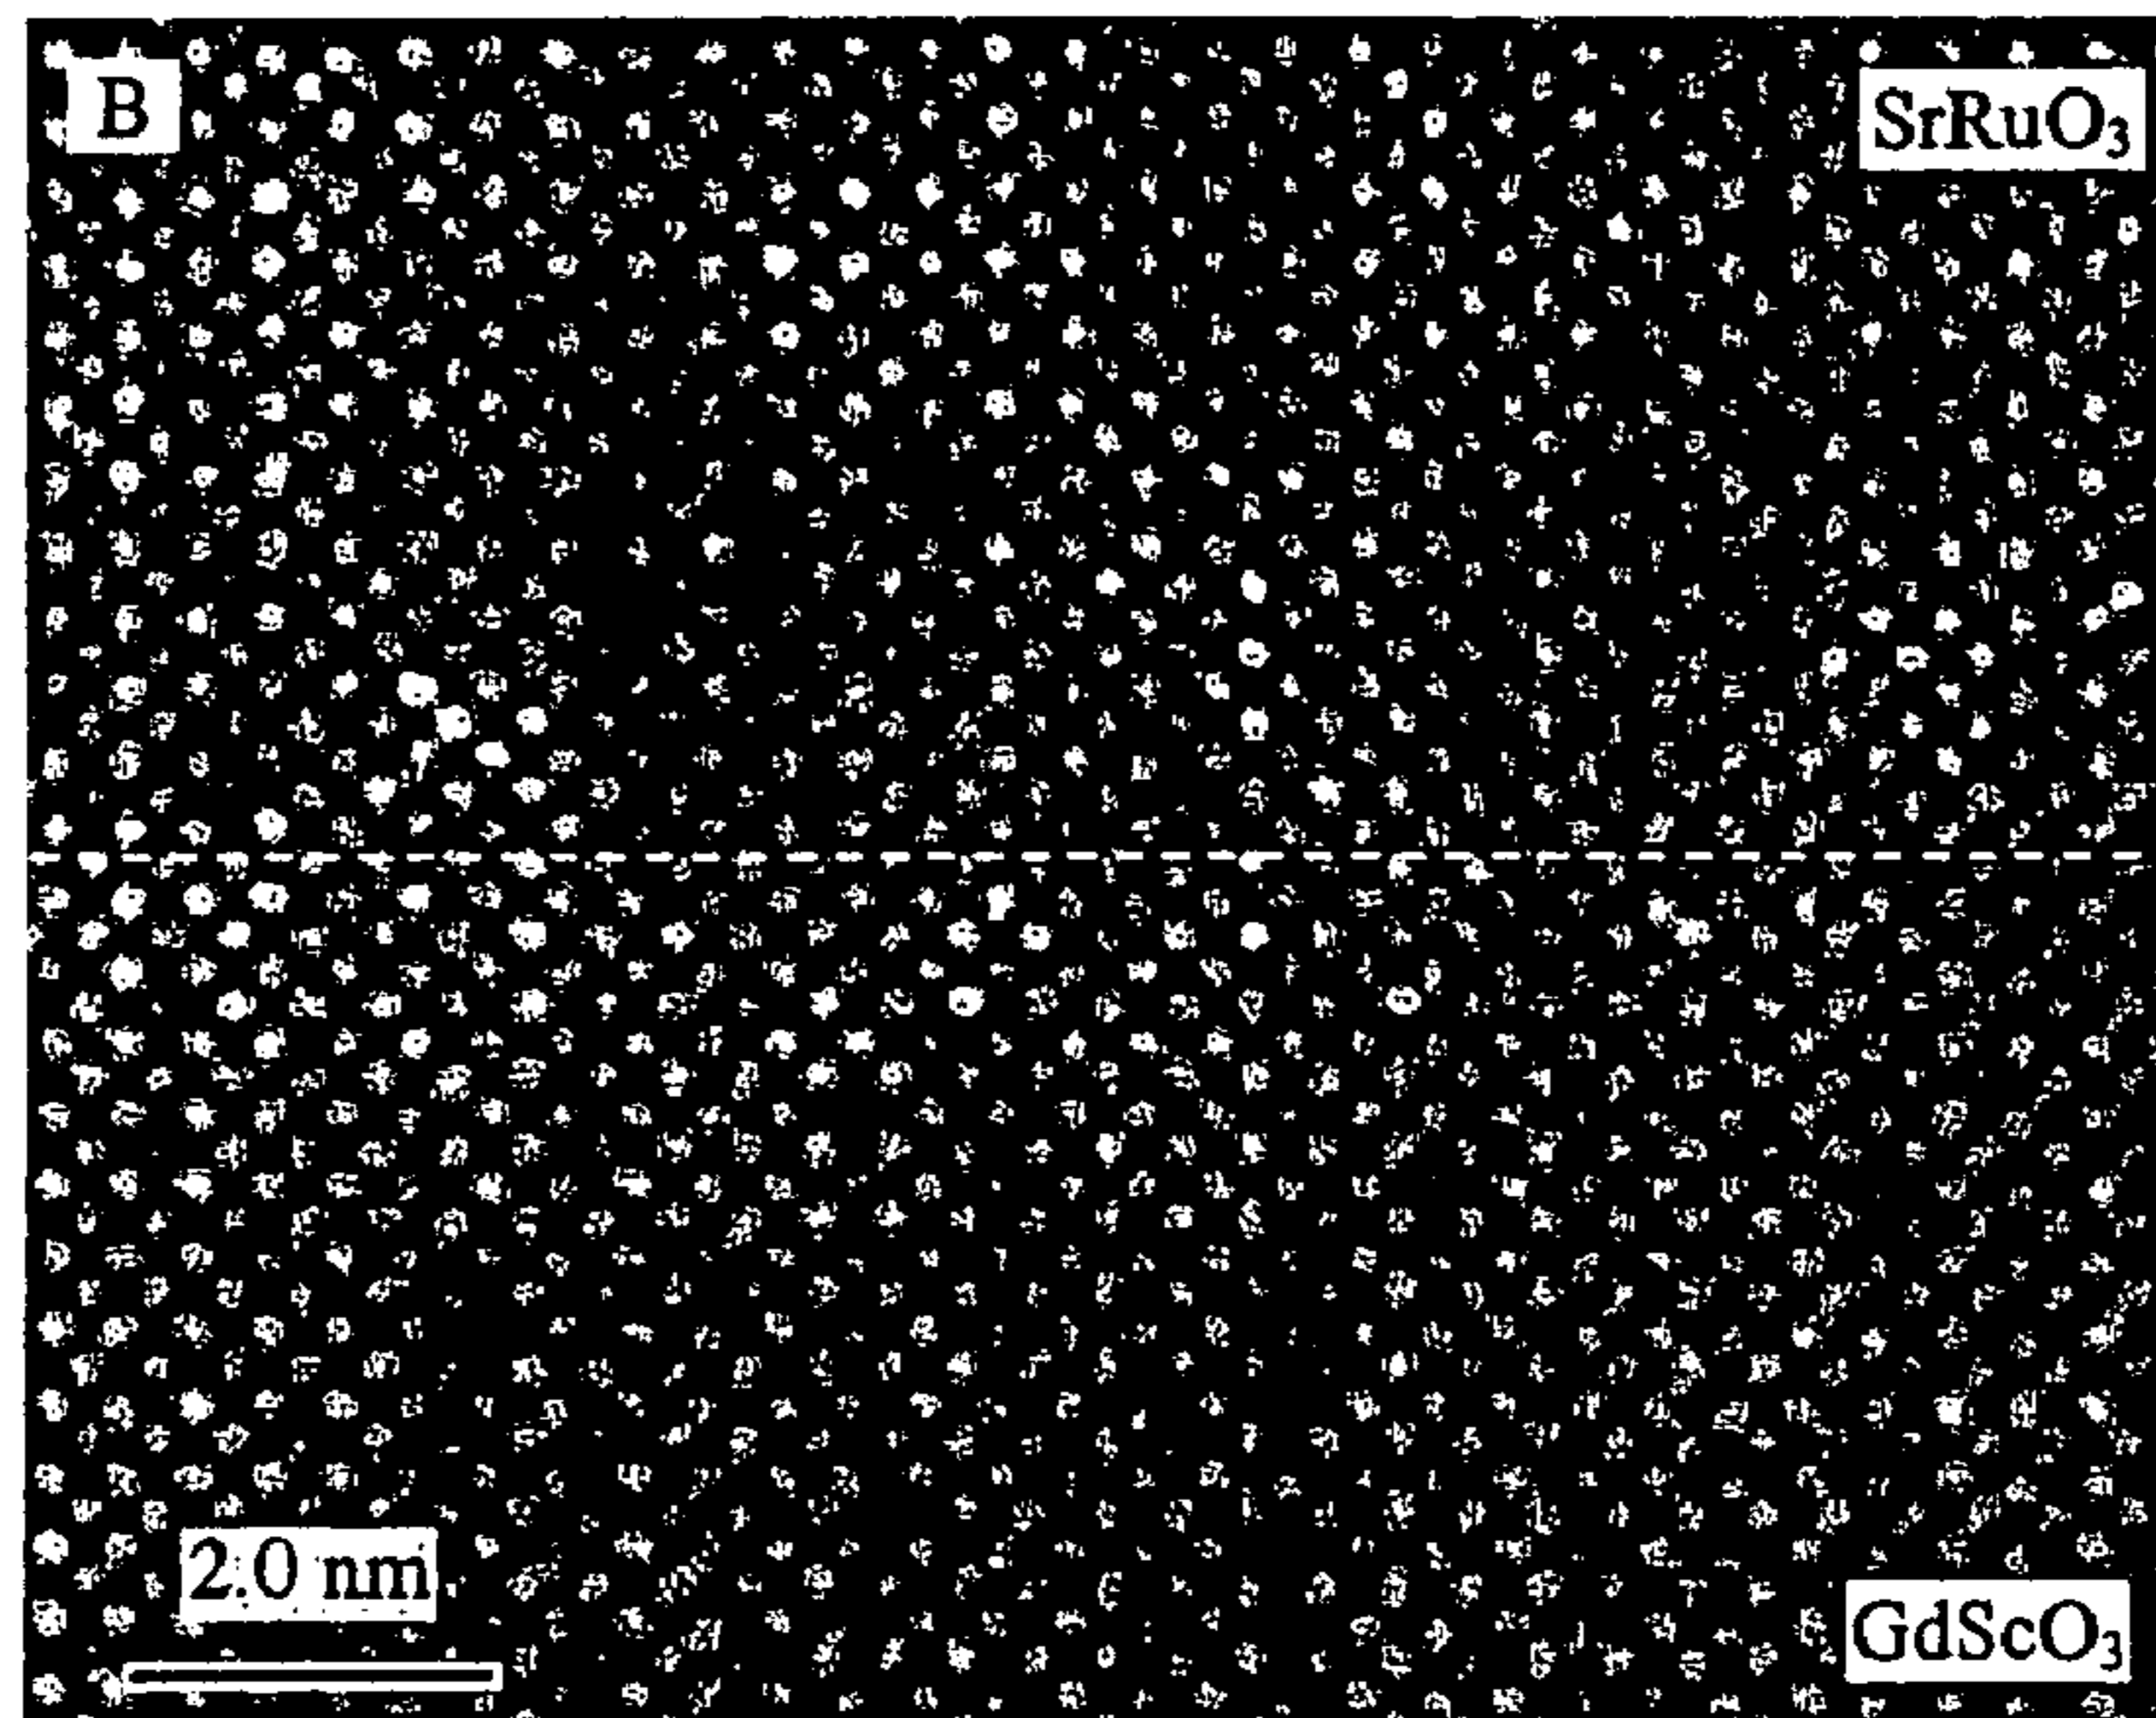


FIG. 14

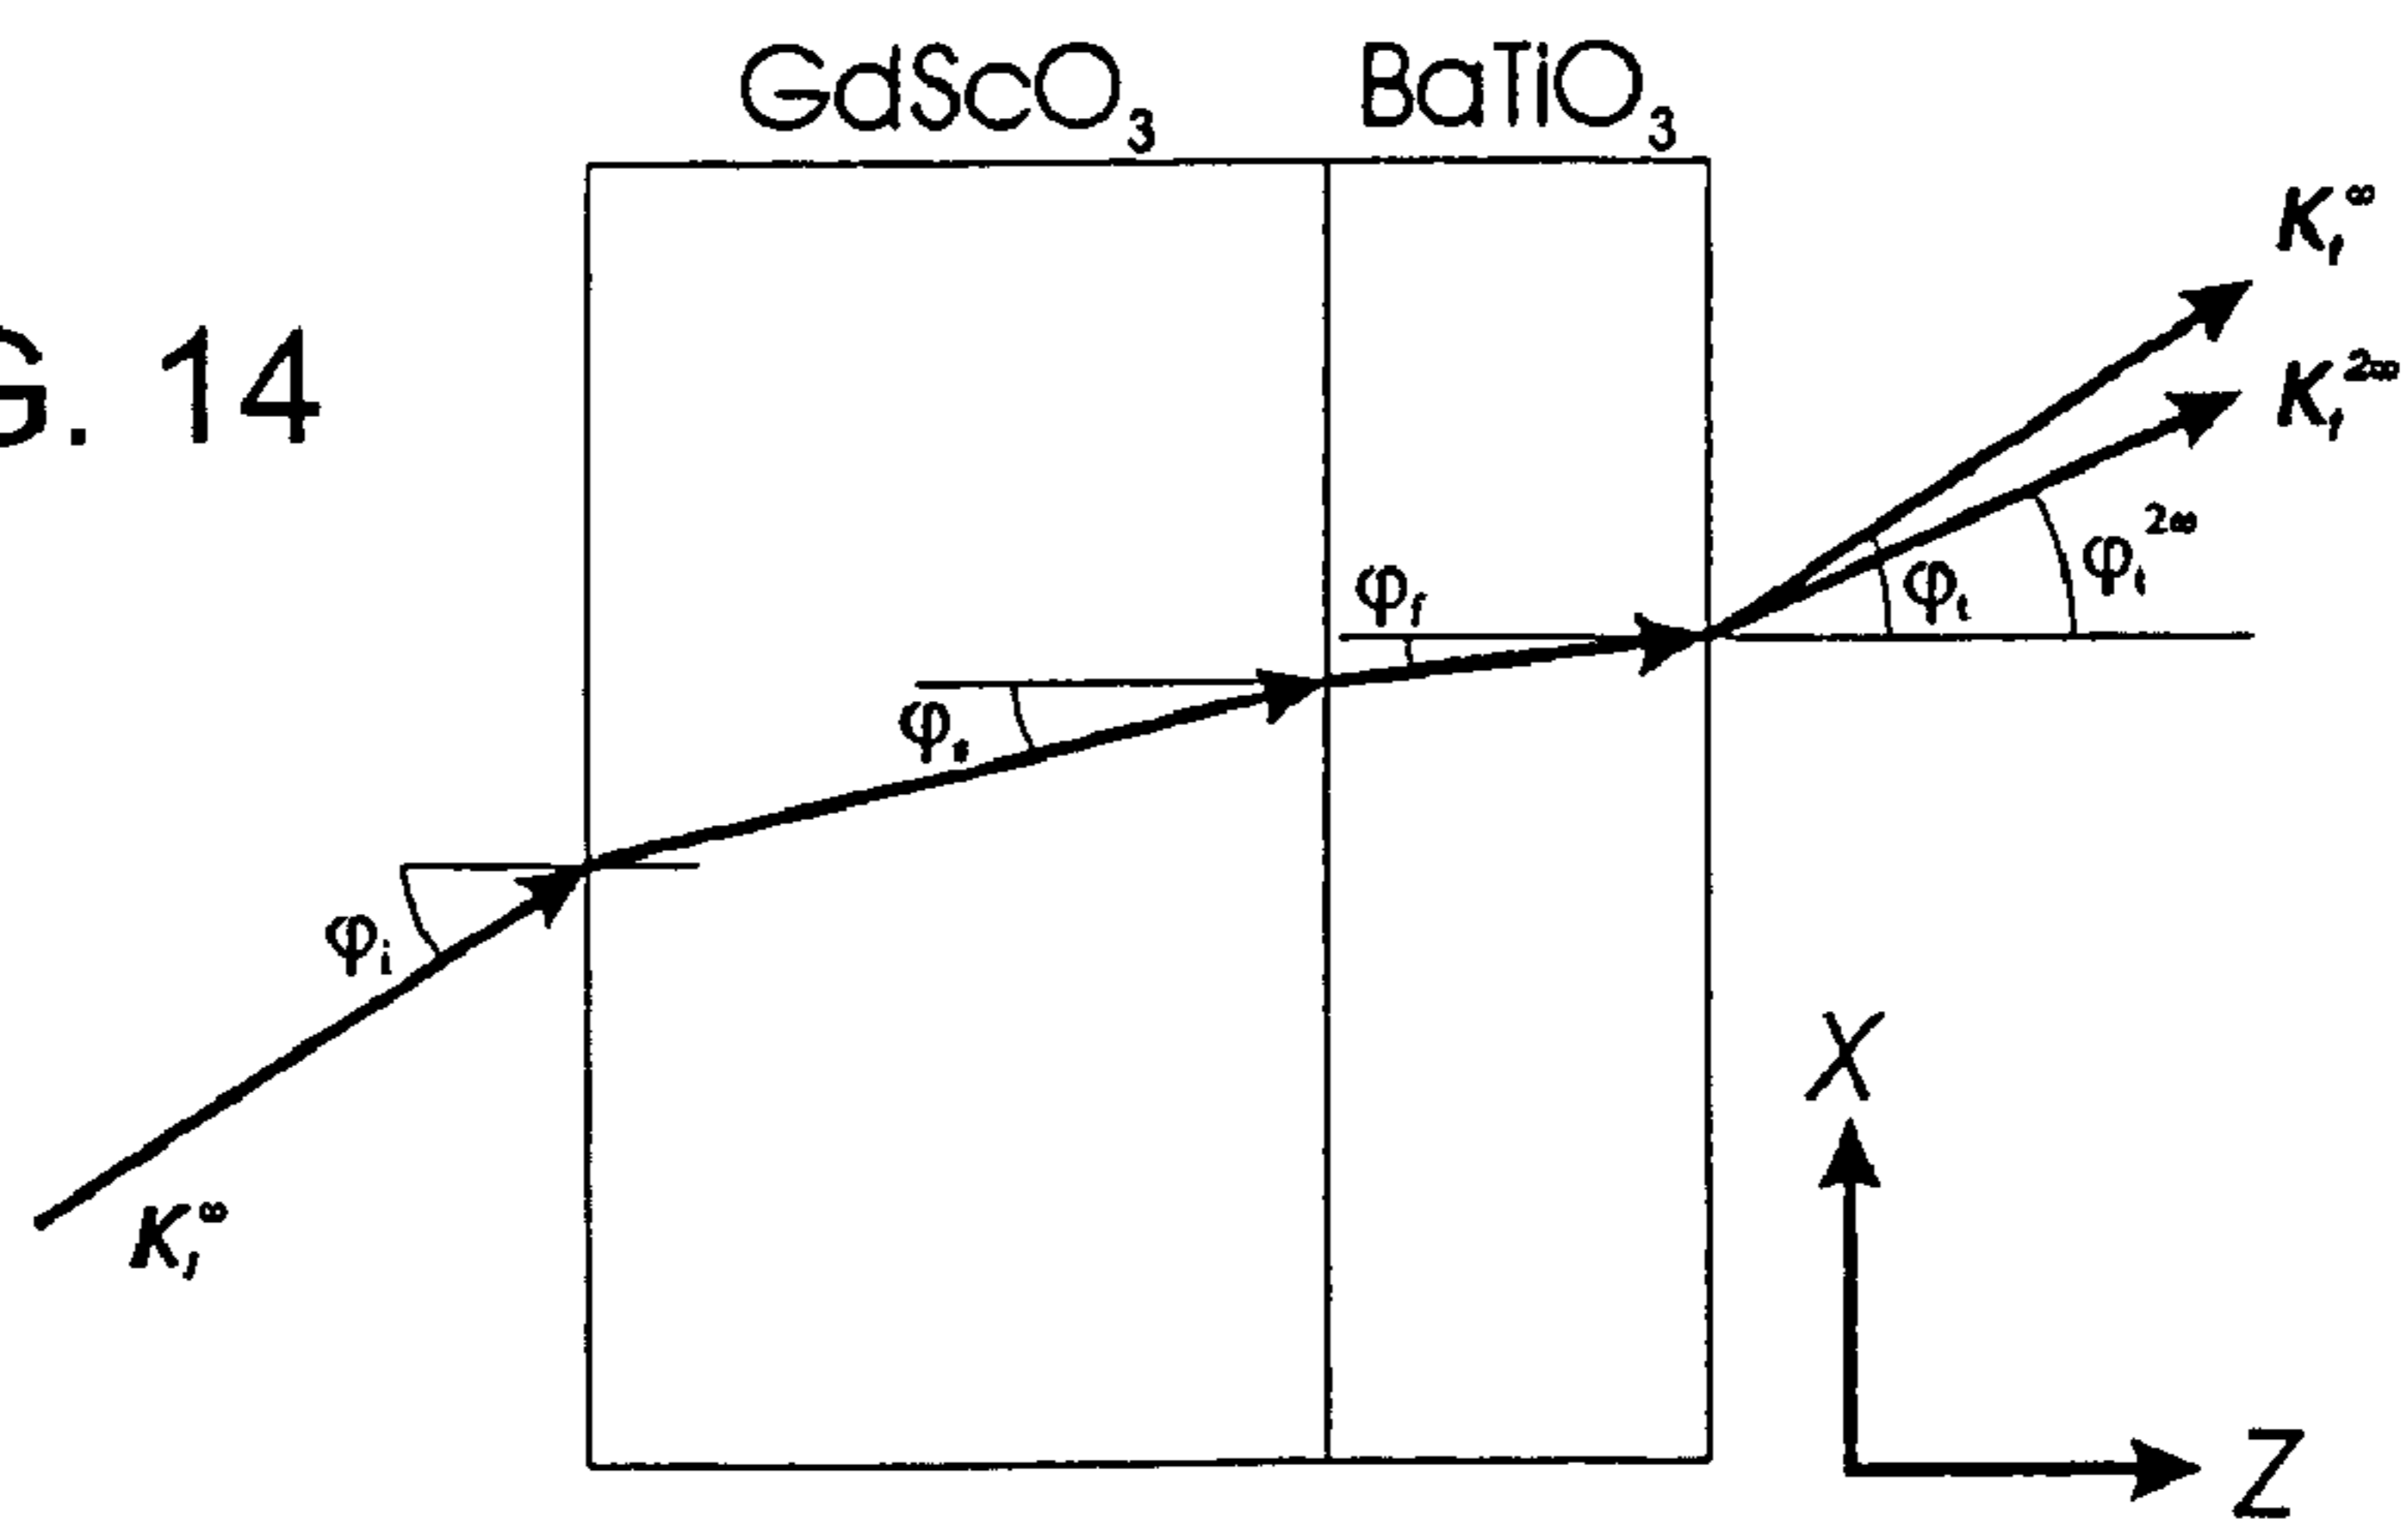

STRAIN-ENGINEERED FERROELECTRIC THIN FILMS

STATEMENT OF GOVERNMENT RIGHTS

This invention was made with United States government support awarded by the following agencies: NSF 0296021, 0103354 and 01222638. The United States government has certain rights in this invention.

FIELD OF THE INVENTION

This invention pertains generally to the field of semiconductor and related device manufacturing and particularly to thin film structures.

BACKGROUND OF THE INVENTION

Very large strains can exist in thin films of one material deposited on another material due to differences in crystal lattice parameters and thermal expansion behavior between the thin film and the underlying substrate, or arising from defects formed during film deposition. As a result, the properties of such thin films can be dramatically different than the intrinsic properties of the corresponding unstrained bulk materials. Such strain may be undesirable and lead to degraded film properties, but in appropriate cases and at appropriate strain levels, the strain in the thin film can actually enhance the properties of the thin film for use in certain applications. One example is in the production of more environmentally benign ferroelectric random access memories (FeRAM). Large shifts in the transition temperature T_c and remanent polarization P_r are expected and have been observed in various ferroelectric materials. The two materials most widely being investigated for use for FeRAM devices are $\text{Pb}(\text{Zr},\text{Ti})\text{O}_3$ and $\text{SrBi}_2\text{Ta}_2\text{O}_9$. The major disadvantages in the use of these two materials are the volatility of the lead and bismuth constituents of these materials, which complicates their introduction into semiconductor fabrication facilities, and environmental issues associated with the toxicity of lead. Thus, it would be desirable to have other suitable thin film ferroelectric materials with constituents that are not as volatile and which do not impose potential environmental risks.

SUMMARY OF THE INVENTION

In accordance with the present invention, the properties of ferroelectric materials are enhanced using appropriate control of the strain in thin films of such material for use in various applications including ferroelectric memories and electro-optical modulators. The thin films of ferroelectrics can have relatively non-volatile and non-toxic constituents which are well suited for semiconductor fabrication facilities and which are compatible with existing processing of silicon based devices. By control of the strain in the ferroelectric thin films in accordance with the present invention, much higher ferroelectric transition temperatures and much greater remanent polarizations can be achieved as compared to bulk single crystals of the same materials.

A strained thin film structure in accordance with the invention includes a substrate layer formed of a crystalline rare earth scandate material having a top surface. A strained layer of crystalline ferroelectric material is epitaxially grown with respect to the crystalline substrate layer so as to be in a strained state and at a thickness below which dislocations begin to occur in the crystalline ferroelectric layer. Preferably, the thickness of the ferroelectric layer is less than 5 μm , and

most preferably between 1 μm and 50 \AA . An intermediate layer may be grown between the top surface of the substrate layer and the ferroelectric layer wherein the intermediate layer carries the lattice structure of the underlying substrate layer. An appropriate intermediate layer is epitaxially grown on the top surface of the substrate and on which the strained layer of crystalline ferroelectric is epitaxially grown. An additional layer can be formed over the ferroelectric layer such that the layers separated by the ferroelectric layer function as plates of a capacitor. Such capacitor structures can be utilized in ferroelectric capacitive memory cells and in other applications. Further, the substrate layer may be formed on a crystalline silicon base so as to allow the devices in accordance with the present invention to be integrated with circuitry formed on the silicon base.

Examples of preferred materials include GdScO_3 and DyScO_3 for the rare earth scandate substrate layer, BaTiO_3 for the ferroelectric layer, and SrRuO_3 for the intermediate layer.

Further objects, features and advantages of the invention will be apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1 is a diagram showing the expected T_c of (001) BaTiO_3 under biaxial in-plane strain (ϵ_s), based on thermodynamic analyses, with the data points showing the observed ϵ_s and T_c values for coherent BaTiO_3 films grown by MBE (circles) and by PLD (squares) on GdScO_3 and DyScO_3 substrates.

FIG. 2 is a simplified diagram showing a film of BaTiO_3 grown on a substrate of GdScO_3 or DyScO_3 .

FIG. 3 are two-dimensional images at selected temperatures of the x-ray diffraction peaks from a BaTiO_3 single crystal and from strained BaTiO_3 thin films.

FIG. 4 are graphs showing the temperature dependence of the lattice parameters of single crystal BaTiO_3 (c-axis triangles and a-axis squares) and strained BaTiO_3 thin films grown by MBE on DyScO_3 substrates (triangles for out-of-plane BaTiO_3 , squares for in-plane BaTiO_3 , and circles for in-plane DyScO_3) and on GdScO_3 substrates (triangles for out-of-plane BaTiO_3 , squares for in-plane BaTiO_3 , and circles for in-plane GdScO_3); wherein the changes in slope at high temperature signal a phase transition.

FIG. 5 are graphs showing optical SHG signals from a BaTiO_3 single crystal (open circles for heating and closed circles for cooling) and from the same strained BaTiO_3 film on GdScO_3 as in FIG. 4 (open squares for heating and closed squares for cooling), with the inset showing polar plots of SHG intensity (radius) versus fundamental polarization (azimuth), with circles representing experimental data and solid lines representing calculations from theory.

FIG. 6 are graphs showing polarization-electric field hysteresis loops of BaTiO_3 thin film (2000 \AA) capacitors grown by PLD on GdScO_3 and DyScO_3 with SrRuO_3 top and bottom electrodes, with the inset showing the hysteresis loop of an unstrained bulk BaTiO_3 single crystal for comparison purposes.

FIG. 7 are graphs showing temperature dependence of the lattice parameters of strained $\text{SrRuO}_3/\text{BaTiO}_3/\text{SrRuO}_3$ capacitor structures grown by PLD on DyScO_3 substrates (closed triangles for out-of-plane BaTiO_3 , open squares for in-plane BaTiO_3 , open circles for in-plane DyScO_3) and on GdScO_3 substrates (closed triangles for out-of-plane BaTiO_3 ,

open squares for in-plane BaTiO₃, and open circles for in-plane GdScO₃, with the change in slope at high temperature indicating a phase transition.

FIG. 8 is a bright-field TEM image showing a 200 nm thick BaTiO₃ film grown on a (110) GdScO₃ substrate with a (110) SrRuO₃ bottom electrode layer.

FIG. 9 is a selected area electron diffraction pattern corresponding to the BaTiO₃ layer.

FIG. 10 is a selected area electron diffraction pattern corresponding to the SrRuO₃ layer.

FIG. 11 is a selected area electron diffraction pattern corresponding to the GdScO₃ substrate.

FIG. 12 is a high resolution TEM image showing the BaTiO₃/SrRuO₃ interface with a dashed line marking the position of the interface.

FIG. 13 is a high resolution TEM image showing the SrRuO₃/GdScO₃ interface with a dashed line marking the position of the interface.

FIG. 14 is a schematic diagram of the geometry of the SHG measurement (not to scale), showing wavevectors k^ω and $k^{2\omega}$ for the fundamental frequency (ω) and the second harmonic frequency (2ω) and the incidence and refraction angles ϕ , with the subscripts i, s, f, and t, corresponding to incidence, substrate, film, and transmitted, respectively.

DETAILED DESCRIPTION OF THE INVENTION

The present invention utilizes detailed investigations of the properties of ferroelectric thin films to achieve significantly improved ferroelectric properties as compared to the bulk ferroelectric. The present invention may be used with various crystalline ferroelectrics, examples only of which are BaTiO₃, lead zirconium titanate (PZT), BiFeO₃, and lead magnesium niobate-lead titanate (PMN-PT). For purposes of illustration, the invention is exemplified below with respect to BaTiO₃, a preferred ferroelectric material, but it is understood that the invention is not limited thereto.

To predict the T_C enhancement and the temperature dependence of the lattice parameters of BaTiO₃ thin films under large biaxial strains using Landau thermodynamic theories, we determined a new set of phenomenological coefficients, since existing ones are only applicable to small compressive strains ($< \sim 0.4\%$). FIG. 1 shows the T_C enhancement predicted from thermodynamic analysis for a BaTiO₃ thin film under biaxial strain

$$\varepsilon_s = \frac{a_{11} - a_0}{a_0},$$

where a_0 is the lattice parameter of free-standing cubic BaTiO₃ and a_{11} is the in-plane lattice parameter of a biaxially strained (001) BaTiO₃ film. The dark shaded range of transition region shows the range in predicted T_C due to the range of reported property coefficients for BaTiO₃ that enter into the thermodynamic analysis. FIG. 1 implies that a biaxial compressive strain of only $\sim 1\%$ should be sufficient to produce strained (001) BaTiO₃ films with a T_C comparable to or higher than unstrained Pb(Zr,Ti)O₃ films.

Although FIG. 1 might seem to imply that T_C can be enhanced without bound, there are limits to strain engineering. The driving force for film relaxation increases with strain and film thickness. When films are grown to thicknesses greatly exceeding their critical values, relaxation toward a zero-strain state by the introduction of dislocations begins. Thus, it is important to grow films below, or at least close to,

their critical thickness for relaxation. As the critical thickness at which dislocations begin to form varies approximately inversely with lattice mismatch, lower mismatch is desired to allow strained BaTiO₃ films to grow that are thick enough to allow their ferroelectric properties to be conveniently probed or utilized in devices. FIG. 1 only applies to thick strained ferroelectrics; as ferroelectrics get thin ($< \sim 100$ Å), their ferroelectric properties can be drastically diminished by finite-size effects. Optimizing the trade off between strain and film thickness depends on the particular application. For FeRAMs, films several hundred angstroms in thickness are needed. Based on the equilibrium critical thickness for BaTiO₃, this would constrain ε_s to be less than about 0.5%; however, we have found that it is possible to grow 500 Å thick coherent BaTiO₃ films at $\varepsilon_s = -1.7\%$.

Single crystal substrates of GdScO₃ and DyScO₃ were used because they are structurally, chemically, and thermally compatible with BaTiO₃, and they have appropriate lattice constants to impart ε_s of about -1.0% and -1.7% , respectively, on coherent (001) BaTiO₃ films. As illustrated in FIG. 2, BaTiO₃ thin films 20 were epitaxially grown on (110) GdScO₃ and (110) DyScO₃ substrate layers 21 by reactive molecular beam epitaxy (MBE) and by pulsed laser deposition (PLD) with in situ high-pressure reflection high-energy electron diffraction, as discussed in further detail below.

The lattice parameters of the strained (001) BaTiO₃ thin films are summarized in Table 1. These films are epitaxial, purely c-axis oriented (the c-axis of all BaTiO₃ domains is perpendicular to the wafer surface as illustrated in FIG. 2) and, with the exception of the 2000 Å thick BaTiO₃ film on DyScO₃, are fully coherent with the substrates, without any resolvable lattice relaxation.

TABLE 1

Results from high-resolution x-ray diffraction measurements on the films. The in-plane (a) and out-of-plane (c) lattice constants and full width at half maximum (FWHM) of rocking curves of various peaks (002 of BaTiO ₃ , 200 _{pseudo-cubic} of SrRuO ₃ and 200 _{pseudo-cubic} of GdScO ₃ and DyScO ₃) at room temperature are given.				
		a(±0.002)(Å)	c(±0.0005)(Å)	FWHM(°)
<u>MBE</u>				
BaTiO ₃ (1000 Å) on GdScO ₃	BaTiO ₃ GdScO ₃	3.964	4.0693	0.080
BaTiO ₃ (500 Å) on DyScO ₃	BaTiO ₃ DyScO ₃	3.965	3.9638	0.009
		3.940	4.0953	0.120
		3.943	3.9396	0.009
<u>PLD</u>				
BaTiO ₃ (2000 Å) on SrRuO ₃	BaTiO ₃ SrRuO ₃	3.965	4.0692	0.042
(1000 Å) on GdScO ₃	GdScO ₃	3.968	3.9052	0.036
BaTiO ₃ (500 Å) on SrRuO ₃	BaTiO ₃ SrRuO ₃	3.964	3.9646	0.008
(2000 Å) on DyScO ₃	DyScO ₃	3.939	4.0989	0.045
BaTiO ₃ (2000 Å) on SrRuO ₃	BaTiO ₃ SrRuO ₃	3.943	3.9110	0.022
(1000 Å) on DyScO ₃	DyScO ₃	3.944	3.9396	0.009
BaTiO ₃ (2000 Å) on SrRuO ₃	BaTiO ₃ SrRuO ₃	3.958	4.0819	0.135
(1000 Å) on DyScO ₃	DyScO ₃	3.947	3.9187	0.047
BaTiO ₃ single crystal	DyScO ₃ (published reference data)	3.944	3.9398	0.009
		3.992	4.036 Å	

To identify the ferroelectric phase transition, the temperature dependence of the in-plane and out-of-plane lattice parameters of the films and substrates was measured using a variable-temperature four-circle x ray diffractometer equipped with a two-dimensional (2 D) area detector with an angular resolution of $\sim 0.02^\circ$. Unstrained BaTiO₃ undergoes a

ferroelectric transition at about 130° C. from the high-temperature cubic ($Pm\bar{3}m$) to the low-temperature tetragonal ($P4mm$) phase. FIG. 3 shows 2-D images of the 002 and 202 diffraction peaks at selected temperatures from a BaTiO₃ single crystal as well as from coherent BaTiO₃ thin films grown on (110) GdScO₃ and (110) DyScO₃ substrates. There is no significant change in the diffraction peaks of the BaTiO₃ thin films at or above $T_c \sim 130^\circ$ C. As expected, the single diffraction spot of the BaTiO₃ single crystal splits into two below 130° C., corresponding to a and c domains of the tetragonal ($P4mm$) ferroelectric phase.

The in-plane and out-of-plane lattice parameters of the strained BaTiO₃ films grown by MBE were determined from the 202 and 002 diffraction peaks and are plotted as a function of temperature in FIG. 4. The in-plane lattice parameters of the BaTiO₃ layer are coherent to the underlying substrates over the entire temperature range (25-700° C.). There are striking differences in the evolution of the lattice parameters with temperature between the unstrained BaTiO₃ single crystal and the strained BaTiO₃ thin films. Notably, the BaTiO₃ thin films never become cubic; they remain tetragonal due to the biaxial substrate constraint. The predicted dependence of the c lattice parameter of biaxially strained BaTiO₃, with and without a ferroelectric phase transition, was calculated from thermodynamic analysis and is shown by the solid curve and dashed curve, respectively, in FIG. 4. As the BaTiO₃ film is clamped in-plane, all structural changes due to the phase transition and thermal expansion are accommodated through changes in the out-of-plane lattice parameter only. The agreement between the prediction and the measured c axis lattice parameters in FIG. 4 is strong evidence that the change in slope in the c axis lattice parameter at high temperature corresponds to a ferroelectric phase transition. Analogous lattice constant behavior has been observed in other constrained ferroelectric films (E. D. Specht, et al., Phys. Rev. Lett. 80, 4317 (1998); S. K. Streiffer, et al., Phys. Rev. Lett. 89, 067601 (2002)), is consistent with theory (M. Sepiarsky, et al., J. Appl. Phys. 91, 3165 (2002); S. K. Streiffer, et al. (2002), supra), and has been used to determine T_c . The T_c of the coherent BaTiO₃ thin films shown in FIG. 4 are $\sim 400^\circ$ C. on GdScO₃ and $\sim 540^\circ$ C. on DyScO₃.

To confirm the huge shifts in T_c , measurements were made of polarization hysteresis loops on a 2000 Å thick coherent BaTiO₃ film grown by PLD on a coherent SrRuO₃ bottom electrode on (110) GdScO₃. At temperatures up to about 200° C., hysteresis loops were clearly seen, but at higher temperatures the dielectric losses in the films became too high for reliable measurements. Second harmonic generation (SHG) measurements were made as a function of temperature on this PLD-grown BaTiO₃/SrRuO₃/GdScO₃ sample as well as the MBE-grown BaTiO₃/GdScO₃ sample whose lattice constants vs. temperature behavior is shown in FIG. 4. An SHG signal is only exhibited by materials that lack inversion symmetry. All ferroelectrics must lack inversion symmetry, but there are many materials that lack inversion symmetry and are not ferroelectric. This makes SHG a necessary but insufficient probe for ferroelectricity. Nonetheless, FIG. 5 shows that the phase that is known from hysteresis loops to be ferroelectric at room temperature remains non-centrosymmetric to the same high temperature where x-ray diffraction indicates a phase transition. The interpretation consistent with all of these analyses—x-ray diffraction, SHG, and hysteresis measurements—is that biaxial compressive strain increases the T_c of BaTiO₃.

Hysteresis measurements were made on 200 μm diameter capacitors, shown for illustration at 25 in FIG. 6, of a strained BaTiO₃ thin film 26 sandwiched between epitaxial top and

bottom electrodes 27 and 28 of the conducting perovskite oxide SrRuO₃ which was grown epitaxially on substrate layers 30 of GdScO₃ and DyScO₃. High-resolution x-ray diffraction measurements (summarized in Table 1) revealed the BaTiO₃ ferroelectric layers as well as the 1000 Å thick SrRuO₃ bottom electrodes to be fully coherent with the underlying substrates. No relaxation was observed even for BaTiO₃ films as thick as 500 Å on DyScO₃ and 2000 Å on GdScO₃. The critical thicknesses of BaTiO₃ thin films grown on coherent SrRuO₃ bottom electrodes on GdScO₃ and DyScO₃ are higher than those of BaTiO₃ films grown directly on GdScO₃ and DyScO₃. This observation is consistent with critical thickness theory, where the difference arises from strain partitioning between the layers as well as the altered geometry of misfit dislocations in a single layer versus a bilayer. Because the leakage in the coherent stack containing a 500 Å thick BaTiO₃ layer on DyScO₃ was too high for good ferroelectric hysteresis measurements, a SrRuO₃/BaTiO₃/SrRuO₃/DyScO₃ stack was grown with a 2000 Å thick BaTiO₃ layer. This latter stack had low leakage; however, it was partially relaxed.

FIG. 6 shows the ferroelectric hysteresis loops measured on the ferroelectric stacks grown on GdScO₃ and DyScO₃ substrates 30 with 2000 Å thick BaTiO₃ layers, together with results from a BaTiO₃ single crystal for comparison. The hysteresis loops are shifted in the positive voltage direction. This imprint effect is probably due to the asymmetric interfacial properties of the top and bottom electrodes to the BaTiO₃ films. Even though SrRuO₃ was used for both electrodes, the growth temperature (350° C.) of the top electrode was much lower than that of the bottom electrode (680° C.), which might lead to poor crystallinity of the top electrode and asymmetric interfaces. The P_r and coercive field (E_c) were determined to be $\sim 50 \mu\text{C}/\text{cm}^2$ and 80 kV/cm for the fully coherent BaTiO₃/GdScO₃ sample and $\sim 70 \mu\text{C}/\text{cm}^2$ and 25 kV/cm for the partially relaxed BaTiO₃/DyScO₃ sample, respectively. This P_r value is almost 270% of the $26 \mu\text{C}/\text{cm}^2$ of single crystal BaTiO₃, 250% higher than the switched charge density assumed in the scaling analysis of FeRAM, and comparable to the P_r of unstrained Pb(Zr,Ti)O₃ films. As this P_r of $\sim 70 \mu\text{C}/\text{cm}^2$ was observed in a partially relaxed sample with ϵ_s of -1.3% , a coherently strained BaTiO₃/DyScO₃ sample with ϵ_s of -1.7% , can have an even higher P_r .

Another important feature for the application of ferroelectric capacitors to memory devices is the loss of switched polarization after repeated switching, i.e., fatigue. Fatigue measurements were performed by applying 8.6 μs wide pulses with a repetition frequency of 10 kHz to the top and bottom SrRuO₃ electrodes of the SrRuO₃/BaTiO₃/SrRuO₃/GdScO₃ structure at $V_{max}=4$ V (200 kV/cm). The switched polarization decreased by 10% of its original value after 10⁶ fatigue cycles, but recovered its original value after 10¹⁰ cycles. This is consistent with previous observations of fatigue-free behavior when conducting oxide electrodes are used.

As a verification that the enhancement of T_c observed in coherently strained BaTiO₃ thin films grown by MBE (see FIG. 4) is inherent and applicable to a device structure with a conductive bottom electrode, high-temperature x-ray diffraction measurements were performed on the coherent BaTiO₃ thin films with SrRuO₃ bottom electrodes grown by PLD. FIG. 7 shows the evolution of the in-plane (a) and out-of-plane (c) lattice parameters of the BaTiO₃ film and the GdScO₃ and DyScO₃ substrates as a function of temperature. The in-plane lattice parameters reveal that both the BaTiO₃ and SrRuO₃ layers are coherently strained to the underlying substrates over the entire temperature range. This is consis-

tent with the absence of misfit dislocations along the interface between GdScO_3 and SrRuO_3 and along the interface between SrRuO_3 and BaTiO_3 as shown by the cross-sectional transmission electron microscope images. The transition behavior of the PLD samples was found to be quite similar to those grown by MBE. T_c was determined to be $\sim 420^\circ\text{C}$. and $\sim 680^\circ\text{C}$. for samples grown on GdScO_3 and DyScO_3 , respectively. The solid and dashed lines in FIG. 7 are theoretical predictions of c-lattice parameters with and without the ferroelectric phase transition, which are fairly consistent with the experimentally measured values. The agreement in the results for films grown by MBE and PLD indicates that the observed shifts in ferroelectric properties with strain represent the intrinsic behavior of strained BaTiO_3 . Note also that this experimental dependence of T_c on ϵ_s is consistent with the expectations shown in FIG. 1. It is understood that other film growth processes may be used in addition to MBE and PLD, including sputtering and chemical vapor deposition (CVD and MOCVD).

The foregoing examples demonstrate that the properties of ferroelectric can be dramatically enhanced through strain engineering. These strain-engineered heteroepitaxial thin films provide a broad range of operating temperatures as well as higher remanent polarization for improved noise immunity and the ability to scale FeRAM to smaller cell sizes. The ability to withstand huge strains gives thin films a degree of freedom that is not available in the bulk material. This can be exploited to enhance the ferroelectric properties of any ferroic system, including multiferroics, whose ferroic order parameter has a strong coupling to strain.

The (110) GdScO_3 and (110) DyScO_3 substrates used in the examples above are two of a series of rare-earth scandates with pseudocubic lattice constraints that range from 3.93 Å to 4.05 Å in roughly 0.01 Å increments as the rare earth species is varied. These rare earth scandates have the GdFeO_3 -type orthorhombic structure (space group: Pbnm). GdScO_3 has lattice constants $a=5.488$ Å, $b=5.745$ Å, and $c=7.934$ Å and DyScO_3 has lattice constants $a=5.440$ Å, $b=5.713$ Å, and $c=7.887$ Å. In these structures the (110) plane, spanned by [110] and [001] directions, provides a nearly square base with $c/2=3.967$ Å and $\sqrt{a^2+b^2}/2=3.973$ Å for the in-plane surface mesh of (110) GdScO_3 and $c/2=3.943$ Å and $\sqrt{a^2+b^2}/2=3.944$ Å for (110) DyScO_3 . Thus, (110) GdScO_3 and (110) DyScO_3 substrates provide ϵ_s of about -1.0% and -1.7% , respectively, for the epitaxial growth of coherent (001) BaTiO_3 films. The pseudo-cubic lattice parameters of other rare earth scandates are given in Table 2 below.

TABLE 2

Rare Earth Scandates, pseudo-cubic lattice parameters						
Material	a(Å)	b(Å)	c(Å)	c/2(Å)	$\frac{(a^2+b^2)^{1/2}}{2}$ (Å)	Angle(a \hat{b})
LaScO ₃	5.678	5.787	8.098	4.049	4.053	88.927
CeScO ₃	5.787	5.626	8.047	4.023	4.036	91.633
PrScO ₃	5.770	5.602	8.010	4.005	4.021	91.710
NdScO ₃	5.770	5.579	7.999	4.000	4.013	91.945
PmScO ₃	5.56	5.79	7.94	3.970	4.0136	87.694
SmScO ₃	5.524	5.750	7.953	3.977	3.987	87.719
EuScO ₃	5.502	5.750	7.954	3.977	3.979	87.491
GdScO ₃	5.488	5.746	7.934	3.967	3.973	87.385
TbScO ₃	5.466	5.727	7.915	3.958	3.958	87.344
DyScO ₃	5.440	5.713	7.887	3.943	3.944	87.212
HoScO ₃	5.427	5.714	7.895	3.947	3.940	87.065
ErScO ₃						

TABLE 2-continued

Rare Earth Scandates, pseudo-cubic lattice parameters						
Material	a(Å)	b(Å)	c(Å)	c/2(Å)	$\frac{(a^2+b^2)^{1/2}}{2}$ (Å)	Angle(a \hat{b})
TmScO ₃	5.3913	5.6808	7.886	3.943	3.9159	87.020
YbScO ₃						
LuScO ₃						
BaTiO ₃	3.994		4.038			90
SrTiO ₃	3.905					90

The epitaxial BaTiO_3 thin films were grown on (110) GdScO_3 and (110) DyScO_3 substrates by both MBE and PLD. For the films grown by MBE, molecular beams of the constituent elements were supplied to the surface of untwined (110) GdScO_3 and (110) DyScO_3 substrates held at 700°C . A mixture of 90% O_2 and 10% ozone at a background pressure of 5×10^{-6} Torr was used as the oxidant, incident upon the substrate via a directed inlet nozzle. The BaTiO_3 was deposited by the sequential deposition of BaO and TiO_2 monolayers, where each monolayer dose was controlled in real time by feedback from reflection high-energy electron diffraction (RHEED) intensity oscillations. To grow BaTiO_3 films by PLD, untwined (110) GdScO_3 and (110) DyScO_3 substrates were attached to a resistive heater and positioned 5.0 cm from the target. A KrF excimer laser (248 nm) beam was focused on a stoichiometric BaTiO_3 target to an energy density of 2.0 J/cm^2 and pulsed at 5 Hz. BaTiO_3 films were grown at substrate temperatures ranging from 650 to 800°C . and oxygen pressures of 100-150 mTorr. The PLD system is equipped with high-pressure RHEED, which enabled the layer-by-layer growth of the thin films to be monitored in situ during growth.

The three-dimensional strain state of the films was determined using high-resolution four-circle x-ray diffraction. The crystalline perfection of the films was assessed by measuring the full width at half maximum (FWHM) in ω (rocking curve) of the 002 BaTiO_3 reflection.

The microstructure and interfacial structure of the BaTiO_3 thin films grown on both GdScO_3 and DyScO_3 substrates were characterized by cross-sectional transmission electron microscopy (TEM). FIG. 8 is a bright-field TEM image showing a 200 nm thick BaTiO_3 film grown on a (110) GdScO_3 substrate with a (110) SrRuO_3 bottom electrode layer. The corresponding selected area electron diffraction patterns for each film layer and the substrate are shown in FIGS. 9-11. It was found that the BaTiO_3 film grows epitaxially and is purely c-axis oriented normal to the substrate through the whole film. No misfit dislocations are seen along the interface between GdScO_3 and SrRuO_3 or along the interface between SrRuO_3 and BaTiO_3 . This indicates that both the SrRuO_3 and BaTiO_3 films are strained to the lattice spacing of the substrate by coherent epitaxial growth, which is consistent with the x-ray data shown in FIG. 7 and Table 1. The change in the diffraction contrast of the BaTiO_3 film indicates that the film is highly strained. High-resolution TEM images of the $\text{BaTiO}_3/\text{SrRuO}_3$ and $\text{SrRuO}_3/\text{GdScO}_3$ interfaces are shown in FIGS. 12-13. Sharp interfaces are seen both between GdScO_3 and SrRuO_3 and between SrRuO_3 and BaTiO_3 . The position of the interfaces is indicated by dashed lines.

To measure the polar plots shown in the inset of FIG. 5, incident light at frequency ω (wavelength 900 nm) was polarized at an angle of θ to the x-y plane and $\phi_i=23^\circ$ to the surface normal (z) of the GdScO_3 substrate. The incident fundamental polarization was p-polarized and the output SHG polarization ($I^{2\omega}$ at frequency 2ω (wavelength of 450 nm)) was p-polarized ($\theta=0^\circ$) for the film and s-polarized ($\theta=90^\circ$) for the single crystal.

The general expression for this SHG intensity is given by

$$I^{2\omega} = K_1(\cos^2 \theta + K_2 \sin^2 \theta)^2 + K_3 \sin^2(2\theta)$$

where K_1 , K_2 , and K_3 are constants that depend on nonlinear coefficients (d_{31} , d_{33} , and d_{15}), geometric factors involving Fresnel coefficients, the angles shown in FIG. 14, and microstructural parameters involving the relative area fraction of various polarization variants (domains) in the BaTiO₃ film.

No SHG signal was detected for normal incidence on the film system ($\phi_i=0^\circ$) in FIG. 5, confirming that the strained BaTiO₃ film is indeed predominantly c-axis (001) oriented. X-ray diffraction measurements revealed that following the temperature cycling of the SHG measurement shown in FIG. 5, the film contained ~0.8% by volume of a-domains. These domains have polarization P_s along the $\pm x$ and $\pm y$ directions.

The first term in the equation above involving the constants K_1 and K_2 arises predominantly from domains with polarization P_s along the $\pm z$ directions, and possibly a small amount of contribution from domains with P_s along the $\pm x$ directions. The second term arises from a small SHG contribution from domains with polarization P_s along the $\pm y$ directions. The ratio, $I^{2\omega}(\theta=0^\circ)/I^{2\omega}(\theta=90^\circ)=1/K_2^2$, corresponding to the ratio of p-to-s polarized SHG intensity from the film, is related purely to intrinsic nonlinear coefficients of the film (d_{31} , d_{33} , and d_{15}) and fixed geometric factors, and is independent of the film domain microstructure. Numerical fitting of the polar plots yields the constant $1/K_2=-2.2\pm 0.01$, which is therefore related to intrinsic BaTiO₃ material properties. This constant is found to remain constant between 50° C. and 400° C. in the polar plots, but decreases thereafter in polar plot measurements up to 700° C. This indicates a discontinuity in the intrinsic material property beyond the T_c in the strained BaTiO₃ film.

It is understood that the invention is not confined to the particular embodiments set forth herein as illustrative, but embraces all such forms thereof as come within the scope of the following claims.

What is claimed is:

1. A strained thin film structure comprising:
 - (a) a substrate layer formed of a crystalline rare earth scandate material and having a top surface;
 - (b) a strained layer of crystalline ferroelectric material epitaxially grown with respect to the crystalline substrate layer so as to be in a strained state and at a thickness below which dislocations begin to occur.
2. The thin film structure of claim 1 wherein the ferroelectric layer has a thickness of 5 μm or less.
3. The thin film structure of claim 1 including an intermediate layer of material grown between the top surface of the substrate layer and the ferroelectric layer wherein the intermediate layer carries that lattice structure of the underlying substrate layer.
4. The thin film structure of claim 3 wherein the intermediate layer comprises SrRuO₃ between the top surface of the substrate layer and the layer of ferroelectric and epitaxially grown on the substrate layer.
5. The thin film structure of claim 4 wherein the layer of SrRuO₃ is 1 μm or less in thickness.
6. The thin film structure of claim 4 further including an additional layer of SrRuO₃ formed over the ferroelectric layer whereby the layers of SrRuO₃ can function as plates of a capacitor separated by the layer of ferroelectric acting as a dielectric.
7. The thin film structure of claim 1 further including a base of crystalline silicon on which the substrate layer is formed.
8. The thin film structure of claim 1 wherein the thickness of the ferroelectric layer is at least 50 \AA .

9. The thin film structure of claim 8 wherein the thickness of the ferroelectric layer is less than 5 μm .

10. The thin film structure of claim 1 wherein the substrate layer is formed of a material selected from the group consisting of GdScO₃ and DyScO₃, and the strained layer ferroelectric material comprises BaTiO₃.

11. The thin film structure of claim 10 wherein the strained layer is formed of (001) BaTiO₃ and the substrate layer is formed of (110) GdScO₃ or (110) DyScO₃.

12. The thin film structure of claim 1 wherein the strained layer is grown epitaxially by molecular beam epitaxy.

13. The thin film structure of claim 1 wherein the strained layer is grown epitaxially by pulsed laser deposition.

14. The thin film structure of claim 1 wherein the substrate layer is DyScO₃.

15. The thin film structure of claim 14 wherein the strained layer of BaTiO₃ has a thickness of 500 \AA or less.

16. The thin film structure of claim 1 incorporated into a ferroelectric memory.

17. The thin film structure of claim 1 incorporated into an electro-optical modulator.

18. The thin film structure of claim 1 wherein the structure is located outside of a deposition system in which the strained layer of crystalline ferroelectric material is grown.

19. A strained thin film structure comprising:

- (a) a substrate layer formed of a crystalline material selected from the group consisting of GdScO₃ and DyScO₃ and having a top surface;
- (b) a strained layer of crystalline BaTiO₃ epitaxially grown with respect to the crystalline substrate layer so as to be in a strained state and at a thickness below which dislocations begin to occur.

20. The thin film structure of claim 19 wherein the BaTiO₃ layer has a thickness of 5 μm or less.

21. The thin film structure of claim 19 including an intermediate layer of SrRuO₃ between the top surface of the substrate layer and the layer of BaTiO₃ and epitaxially grown on the substrate layer.

22. The thin film structure of claim 21 wherein the layer of SrRuO₃ is 1 μm or less in thickness.

23. The thin film structure of claim 21 further including an additional layer of SrRuO₃ formed over the BaTiO₃ layer whereby the layers of SrRuO₃ can function as plates of a capacitor separated by the layer of BaTiO₃ acting as a dielectric.

24. The thin film structure of claim 19 further including a base of crystalline silicon on which the substrate layer is formed.

25. The thin film structure of claim 19 wherein the thickness of the layer of BaTiO₃ is at least 50 \AA .

26. The thin film structure of claim 25 wherein the thickness of the layer of BaTiO₃ is less than 5 μm .

27. The thin film structure of claim 19 wherein the strained layer is formed of (001) BaTiO₃ and the substrate layer is formed of (110) GdScO₃ or (110) DyScO₃.

28. The thin film structure of claim 19 wherein the strained layer is grown epitaxially by molecular beam epitaxy.

29. The thin film structure of claim 19 wherein the strained layer is grown epitaxially by pulsed laser deposition.

30. The thin film structure of claim 19 wherein the substrate layer is DyScO₃.

31. The thin film structure of claim 19 wherein the substrate layer is GdScO₃ and the strained layer of BaTiO₃ has a thickness of 2000 \AA or less.

32. The thin film structure of claim 19 wherein the structure is located outside of a deposition system in which the strained layer of crystalline ferroelectric material is grown.